

SPIDER+ 10


design by GIORGIO LODI



● BK-81 / Black / Textured

LED floodlight for indoor and outdoor lighting, comprising:


- Painted, die-cast aluminium housing, in compact size
- Extra-clear, tempered, flat glass diffuser, screen-printed inside
- Waterproof cable gland M16x1.5 for cables Ø 5- Ø 10 mm
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Stainless steel external screws
- Painted steel bracket
- Complete with 1 metre of cable H05RN-F 3G1 mm²
- SPIDER+ 10 KIT models are equipped with a technopolymer ground spike and 3 metres cable H05RN-F 3G1 mm²
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

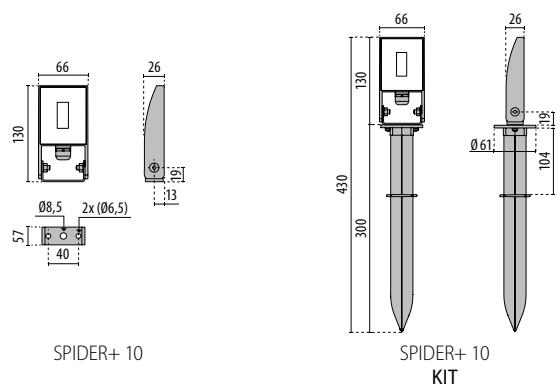

SPIDER+ 10 S/EW

IK06 1J xx3


WATTAGE	CLASS	CEC	KELVIN	COS ϕ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz													
10 W	I	-	80	4000	✓	S/EW	-	1485 lm	634 lm	70	10	35000 h	● 3108610
10 W	I	-	80	3000	✓	S/EW	-	1350 lm	611 lm	70	10	35000 h	● 3108608



SPIDER+ 10 KIT S/EW

IK06 1J xx3

WATTAGE	CLASS	CEC	KELVIN	COS ϕ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz													
10 W	I	-	80	4000	✓	S/EW	-	1485 lm	634 lm	70	10	35000 h	● 3108613
10 W	I	-	80	3000	✓	S/EW	-	1350 lm	611 lm	70	10	35000 h	● 3108612



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
SPIDER+ 10 - SPIDER+ 10 KIT		
Connection Kit Y 3-way D.7-10.5mm IP68		310496
Connection Kit Y 3-way D.14-17mm IP68		310495



310495
310496