
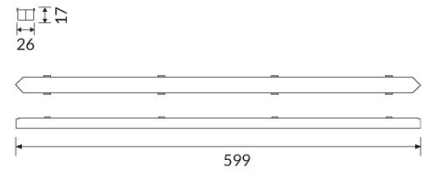


FLIP

Linear fixture compatible with visible structure false ceiling.

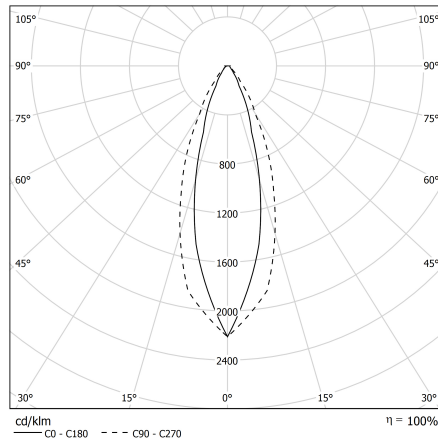

CODE		FLUX	SIZE	CERTIFICATIONS
42PC9L490	9W 4000K	1150lm	599mm	  

Optics

Polycarbonate lens with LIC (Light Indirect Control) technology to favor the indirect lighting.

Specifications

CRI>90;
McAdams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.