

CSD ET 94 Series Drives

Ether CAT.

INTRODUCTION

- New series of stepping motor drives with EtherCAT interface.
- Drives optimized for coupling with SANYO DENKI stepping motors, fitted with encoder.
- Compact system, developed to offer a wide variety of integrated functions and optimized for the most demanding motion control applications.

HIGHLIGHTS

- Communication by means of EtherCAT interface.
- Modes of operation: PROFILE POSITION and CSP.
- Full digital microstepping drive.
- Extremely compact size.
- A highly sophisticated operation system, preserving anyhow the traditional ease of use of R.T.A. drives.



Series	Model	V _{DC} range	I nom.	Dimensions
		(Volt)	(Amp)	(mm)
CSD ET	94	24 to 48	4.0	130x106x32

TECHNICAL FEATURES


- Range of operating voltage: 24-48 V_{pc}.
- Protections:
 - -Protection against under-voltage and over-voltage.
 - -Protection against a short-circuit at motor outputs.
 - -Overtemperature protection.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Available in plastic boxed version with plug-in connectors.
- Maximum compactness.
 - Optoinsulated auxiliary and programmable
- inputs and outputs.
 - Warranty: 24 months.



SETTING BY MEANS OF Ether CAT INTERFACE


- Wide range of motor phase current setting.
- Motor current overboost.
- Intelligent management of the current profile.
- Communication by means of EtherCAT (CoE) interface.
- Modes of operation: PROFILE POSITION and CSP.
- Different variety of HOMING operation modes.
- Encoder feedback.

POWER AND LOGIC CONNECTIONS

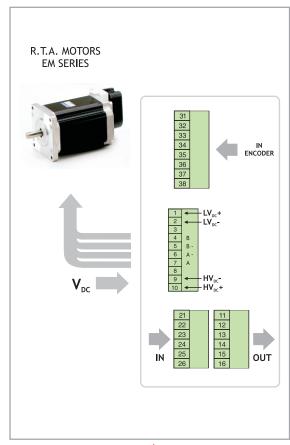



MECHANICAL DIMENSIONS

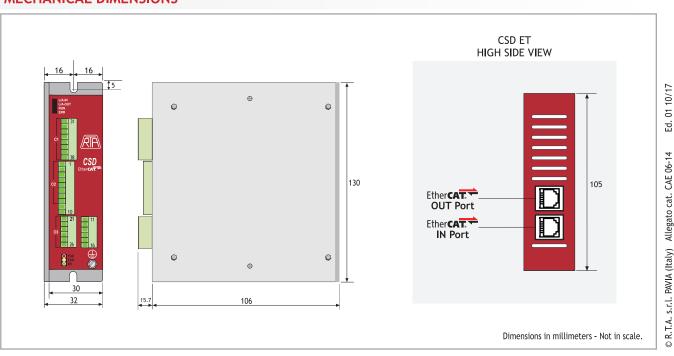



R.T.A. Deutschland GmbH Bublitzer Straße 34 40599 DÜSSELDORF (Germany) Tel. +49.211.749.668.60 - Fax +49.211.749.668.66 www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L. Tel. +34.936.388.805 - Fax +34.936.334.595