
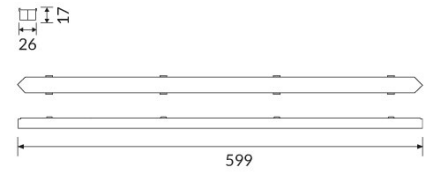



FLIP

Linear fixture compatible with visible structure false ceiling.

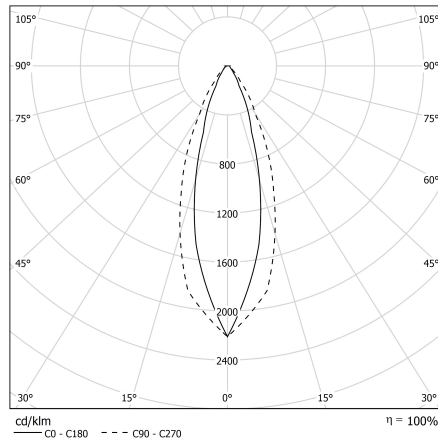

CODE		FLUX	SIZE	CERTIFICATIONS
42PC9L390	9W 3000K	1069lm	599mm	CE IP40 A ⁺

Optics

Polycarbonate lens with LIC (Light Indirect Control) technology to favor the indirect lighting.

Specifications

CRI > 90;
McAdams 3;
Life Time: L80/B10 > 50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor > 0.97.

FLIP

ID CODE: 42




FLIP is the **revolutionary** new way to light spaces that have 24mm **exposed grid suspended ceilings**. The ultra-slim linear fixture can be pattern formed to create contemporary arrays of light, allowing designers much greater freedom rather than designing with standard panel fixtures.

The controlled **direct emission** creates a **low glare (UGR<16)** lit environment, making FLIP ideal for both office lighting and for general spaces. **Broad lateral emission** means the product takes advantage of the false ceiling as a reflective surface to improve contrast ratio and therefore **maximizing visual comfort**. FLIP - free your creativity.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR < 16
-  IP 40



LED

-  3000K/4000K
-  >125 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS


-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code

Optic

Polycarbonate lens with ILC (Indirect Light Control) technology to optimize the indirect lighting element.

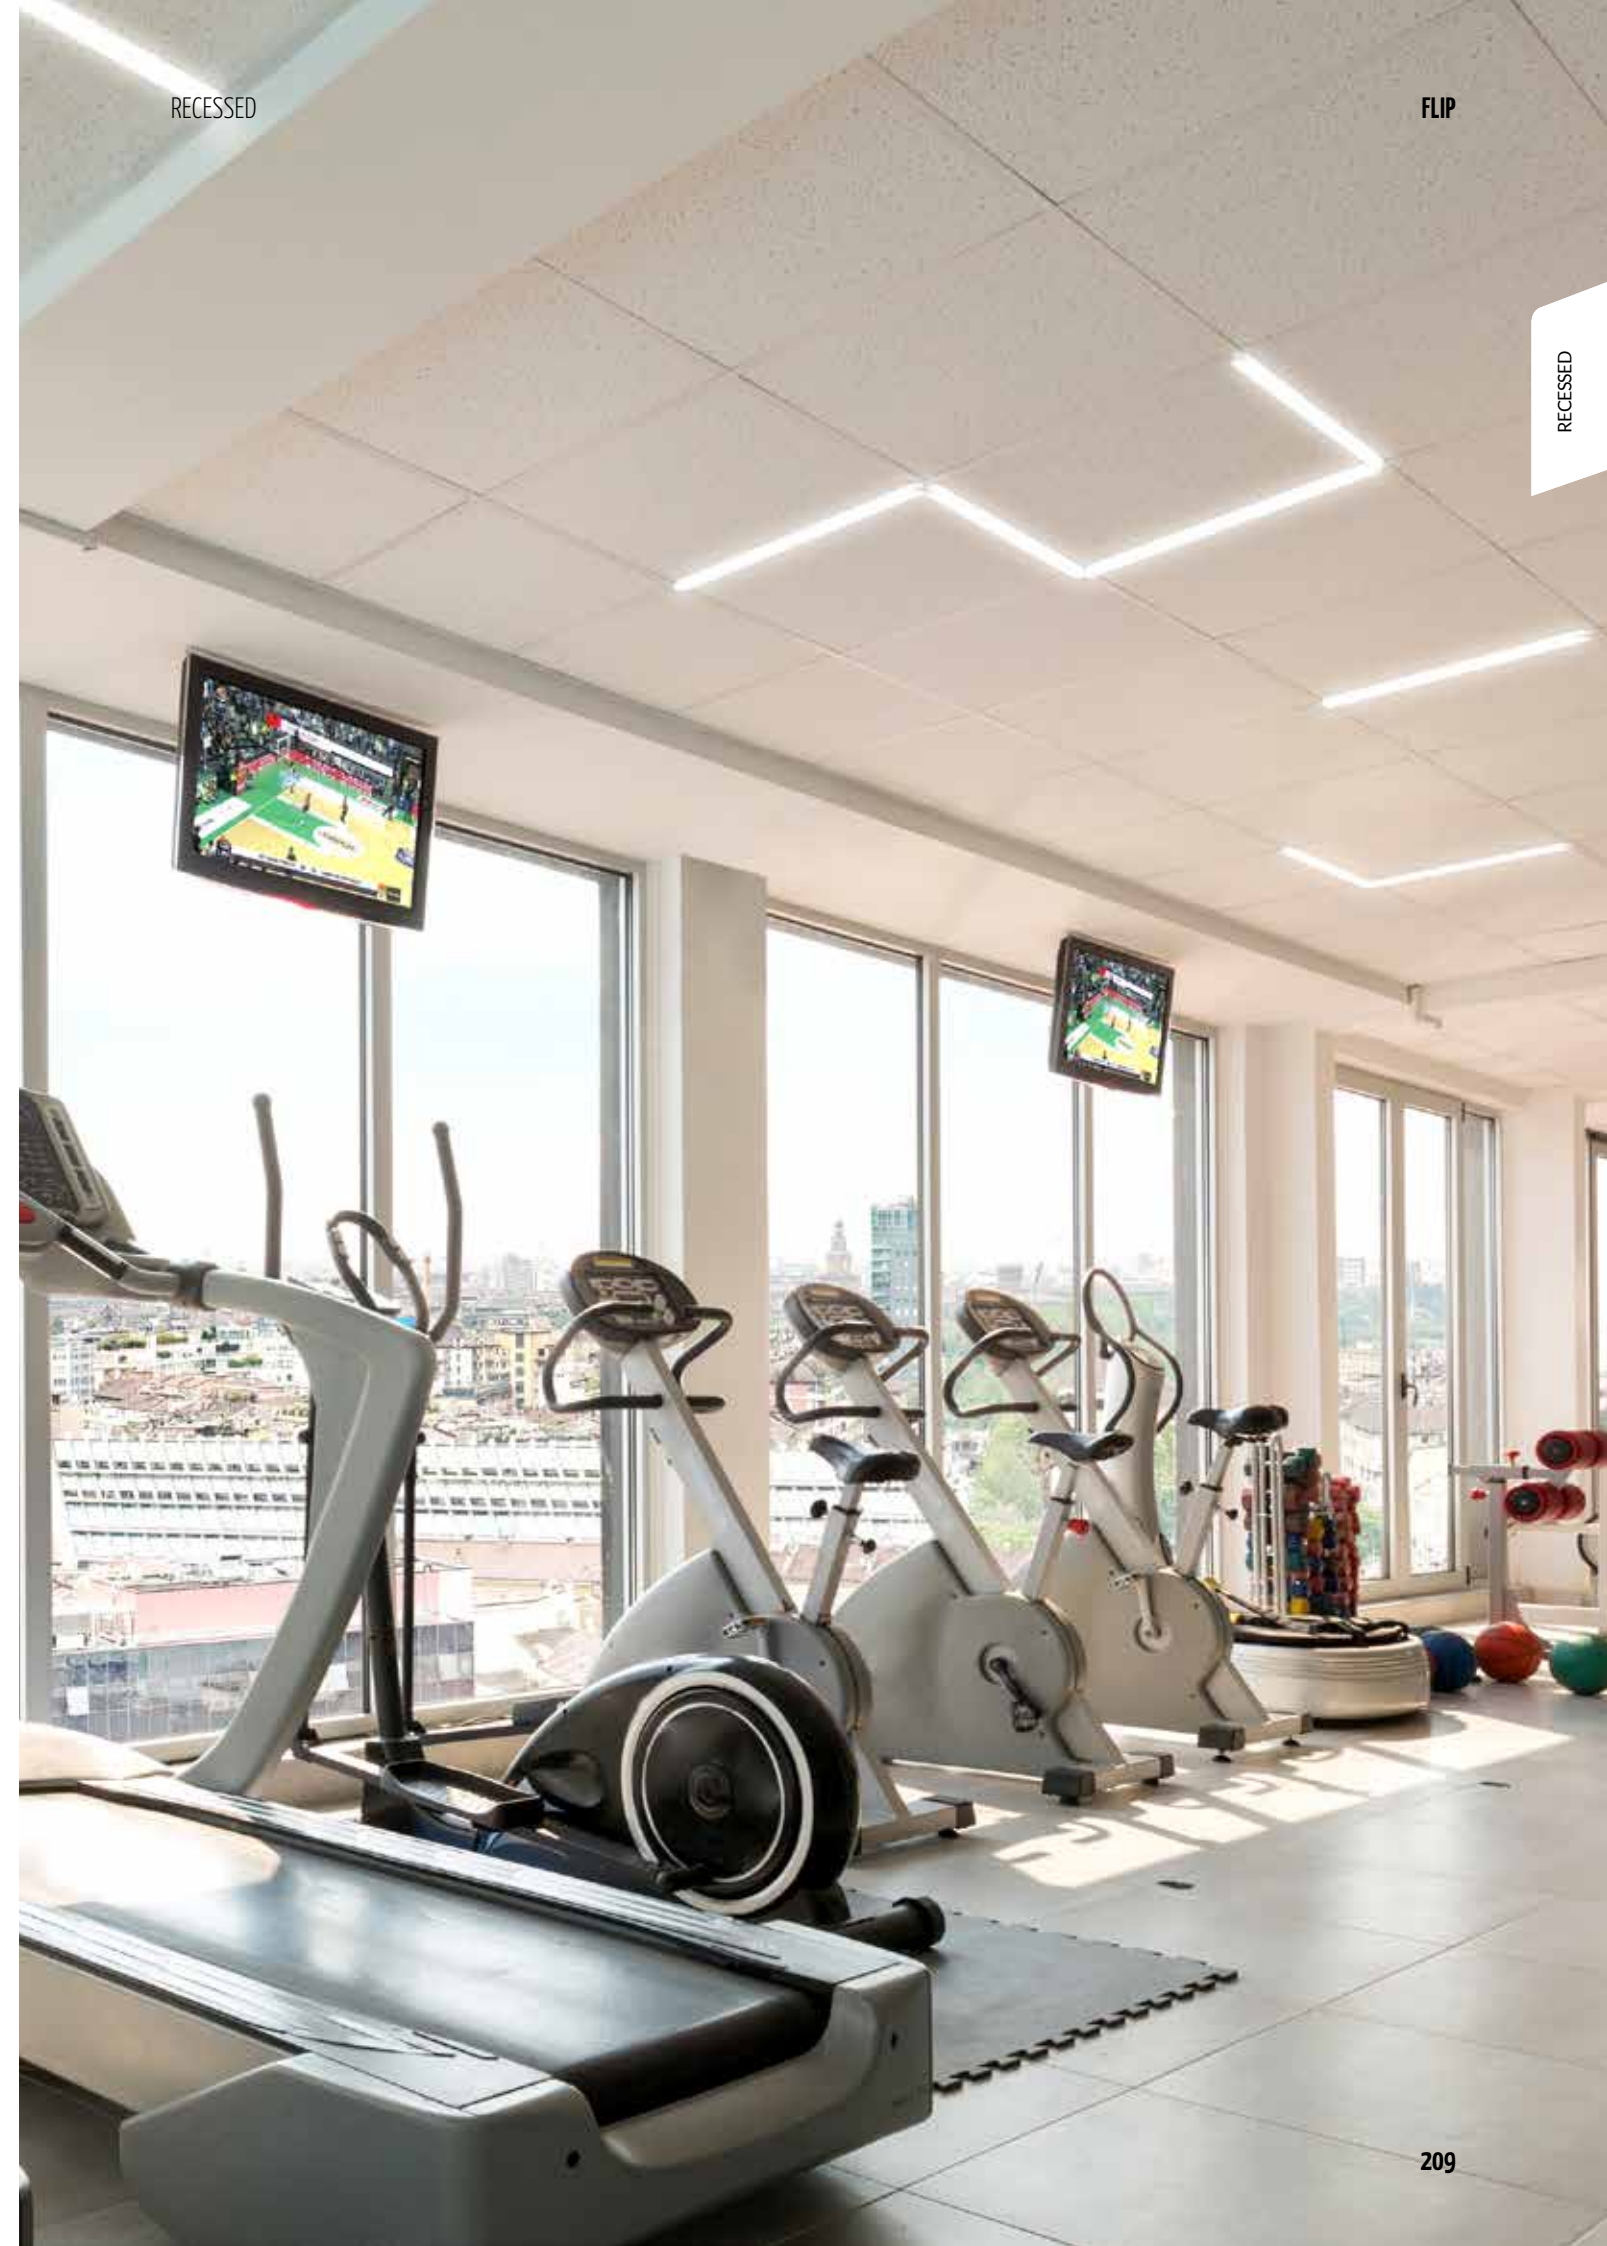



FLIP

OPTIC

Polycarbonate lens with ILC (Indirect Light Control) technology to optimize the indirect lighting element.



IP 40 A'

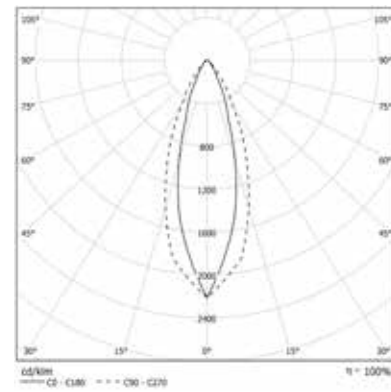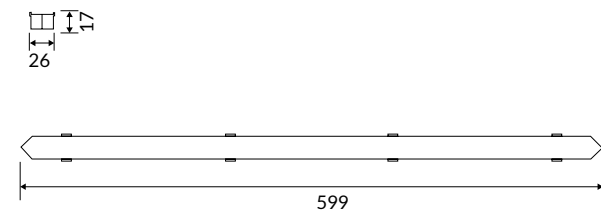

COLOUR TEMPERATURE 4000K			
COD	W	lm	mm
42PC9L490	9W	1150	599

COLOUR TEMPERATURE 3000K			
COD	W	lm	mm
42PC9L390	9W	1069	599

Accessories

CONNECTOR



42AA11EL
Straight electrified connector.



42AA05EL
2 ways 90° electrified connector.



42AA06EL
3 ways electrified connector.



42AA07EL
4 ways electrified connector.

DRIVER



42LC1X
Driver 24V 35W for 1 fixture.



42LC1XRDD
Driver 24V 35W for 1 fixture, DALI version.



42LC4X
Driver 24V 60W up to 4 fixtures.



42LC4XRDD
Driver 24V 60W up to 4 fixtures, DALI version.



42LC10X
Driver 24V 100W up to 10 fixtures.



42LC10XRDD
Driver 24V 100W up to 10 fixtures, DALI version.



42AA14
Kit for installation on plasterboard or semi-recessed panels.

Technical Note

RAPID INSTALLATION



Thanks to the electrified connector and side clips, installation to the ceiling structure is immediate.