
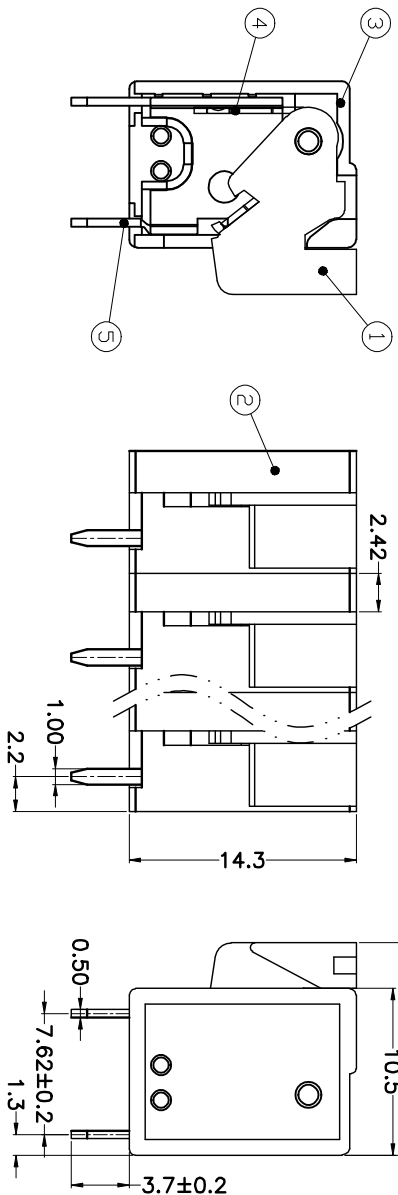


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

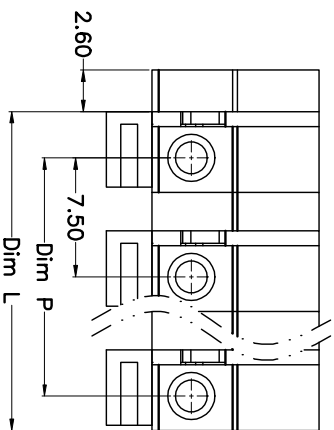


- Material
 - ①Button : PA66, UL94V-0
 - ②Cover : PA66, UL94V-0
 - ③Housing : PA66, UL94V-0
 - ④Reed : Stainless steel
 - ⑤Pin header : Brass, Tin plated

- Electrical
 - UL IEC
 - Rated voltage : 300V 450V
 - Rated current : 10A 15A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-14AWG 1.5mm²

- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 10mm


HOW TO ORDER

KF142V-7.5-XXP-1 X-XXXXX

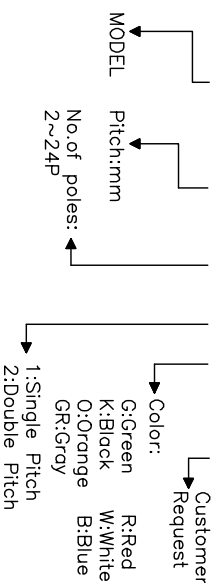

N=Number of Poles
Dim P=(N-1)x7.50
Dim L=Nx7.50-2.42

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

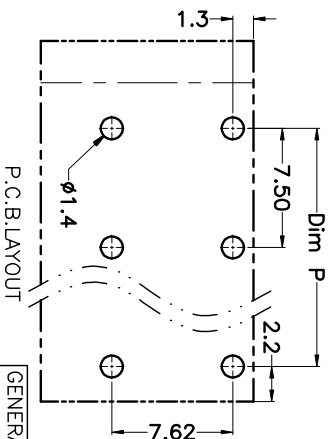

GENERAL TOLERANCE

ANGLE TOLERANCE

DRAWING TYPE	CUSTOMER
X. .X .XX	X. .X .XX
±0.5 ±0.3 ±0.1	±5° ±3° ±1°

SCALE

DRAWING NO.

1:1	SHEET	1 OF 1
XP0012016-xxxx		

PROJECTION

TITLE

UNITS	mm
SHEET SIZE	A4
SERIES	KF142

KF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD