


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

- Material
ØHousing : PA66, UL94V-0
ØPin header : Brass, Tin plated

- Electrical
UL IEC
Rated voltage : 300V 400V
Rated current : 15A 20A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2500V/1min

- Mechanical
Operating temperature: -40℃~+105℃
Soldering temperature: 250℃±5/5sec

HOW TO ORDER
KF2EDGCV-X-7.5-XXP-1 X-XXXXX

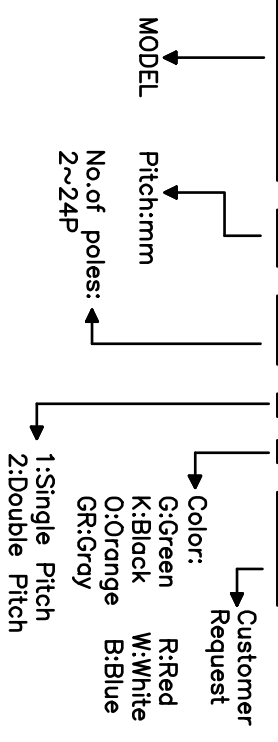

N=Number of Poles Dim P=(N-1)×7.5 Dim L=N×7.5			
Pin No.	Dim P	Dim L	
2-6P	±0.10	±0.15	
7-12P	±0.20	±0.20	
13-18P	±0.25	±0.30	
19-24P	±0.30	±0.40	

P.C.B.LAYUOT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.5	X°.	±5°		mm	KF2EDGCV-X-7.5-XXP	
.X	±0.3	.X°.	±3°				
.XX	±0.1	.XX°.	±1°				
DRAWING TYPE CUSTOMER							
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO. XP0012016-XXXX							
 慈溪市凯峰电子有限公司							
KAI FENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD							

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONIC CO.,LTD