

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG



- Material
①Screws : M2.5 steel, Zinc plated,"-" slot type
②Housing : PA66, UL94V-0
③Contact : Phosphor bronze,Ni plated
④Clamp : Brass, Ni plated
⑤Cover : PA66, UL94V-0

- Electrical
UL IEC
Rated voltage : 300V 400V
Rated current : 15A 10A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2500V/1min
Wire range: 28-12AWG 2.5mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 0.4N.m (3.54lb.in)
Strip length: 7-8mm





HOW TO ORDER

KF2EDGKA-7.5-XXP-1 X-XXXXX

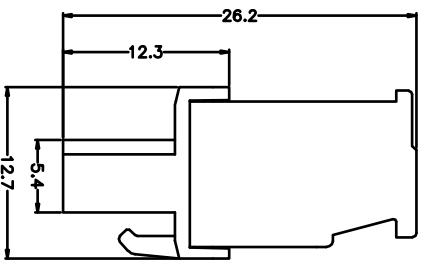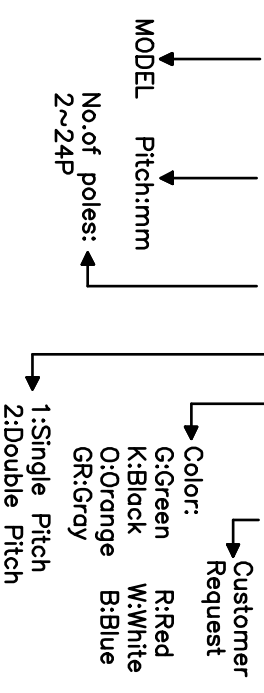

N=Number of Poles
Dim P=(N-1)×7.5
Dim L=N×7.5-1.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

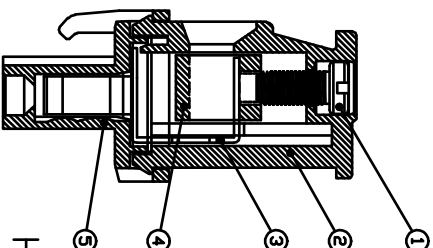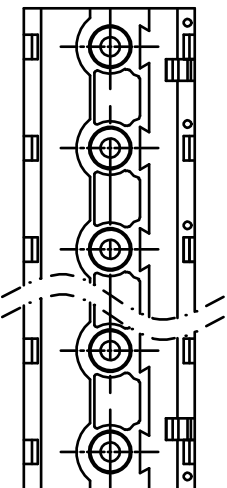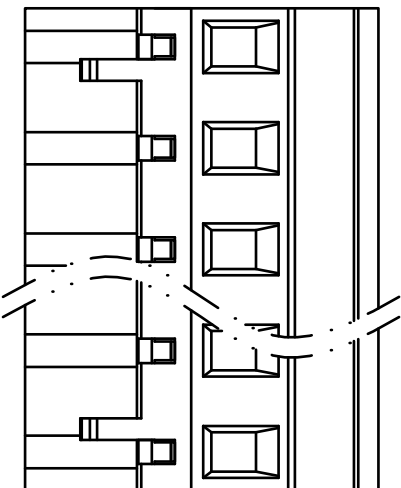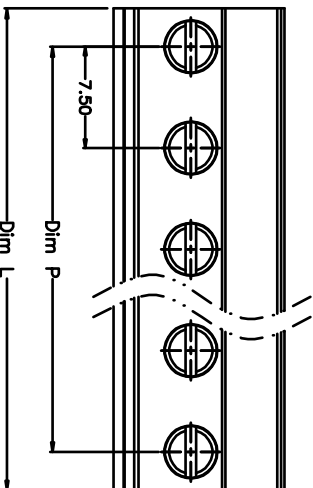

GENERAL TOLERANCE ANGLE TOLERANCE

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.5	X, ±5°
.X ±0.3	.X, ±3°
.XX ±0.1	.XX, ±1°
DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	XP0012016-xxxx

PROJECTION TITLE

UNITS	mm
SHEET SIZE	A4
SERIES	KF2EDGKA

凯峰电子 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD