


# MIMIK 10 POST 1000




|                                  |                                          |
|----------------------------------|------------------------------------------|
| <b>Part number</b>               | 306552                                   |
| <b>Lampholder:</b>               | LED                                      |
| <b>Light Source:</b>             | LED                                      |
| <b>Wattage:</b>                  | 10 W                                     |
| <b>Finish:</b>                   | AN-96 / Anthracite gray / Textured       |
| <b>Insulation class:</b>         | I                                        |
| <b>Degree of protection:</b>     | IP65                                     |
| <b>IK-J-xxIP:</b>                | IK08 5J xx5                              |
| <b>CRI:</b>                      | 70                                       |
| <b>Kelvin:</b>                   | 3000                                     |
| <b>Power factor:</b>             | $\cos\phi \geq 0,9$                      |
| <b>Optic:</b>                    | PEDESTRIAN AND CYCLE REFLECTOR<br>Type 3 |
| <b>Lightsource lumen output:</b> | 1000 lm                                  |
| <b>Luminaire lumen output:</b>   | 719 lm                                   |
| <b>L:</b>                        | L80                                      |
| <b>B:</b>                        | B10                                      |
| <b>Lifetime:</b>                 | 60000 h                                  |
| <b>Ta MIN luminaire:</b>         | -20°                                     |
| <b>Ta MAX luminaire:</b>         | 35°                                      |

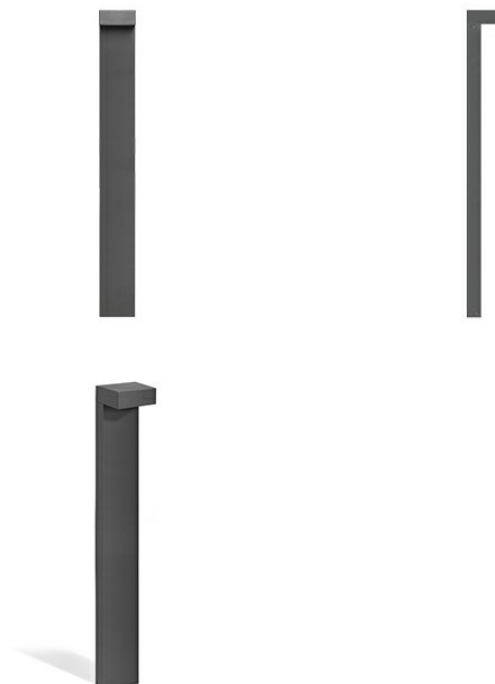


## Description

- Landscaping LED bollard luminaire comprising:
- Painted die-cast aluminium housing and cover
  - Tempered glass diffuser, printed
  - Reflector in satin finish pure aluminium (Al 99.98)
  - Silicone gasket
  - External electrical connection with sealed plug-socket QUICK, complete with cable
  - Stainless steel locking screws
  - Painted extruded aluminium pole
  - Base plate included
  - Complying with the recommendations for glare control and upward light pollution
  - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

## Photometric data



## Technical drawings



## OPTIONAL ACCESSORIES

### MIMIK 10 POST



310496

Connection Kit Y 3-way D.7-10.5mm

IP68