


RM 3R1M


Dimensions (Unit:mm)

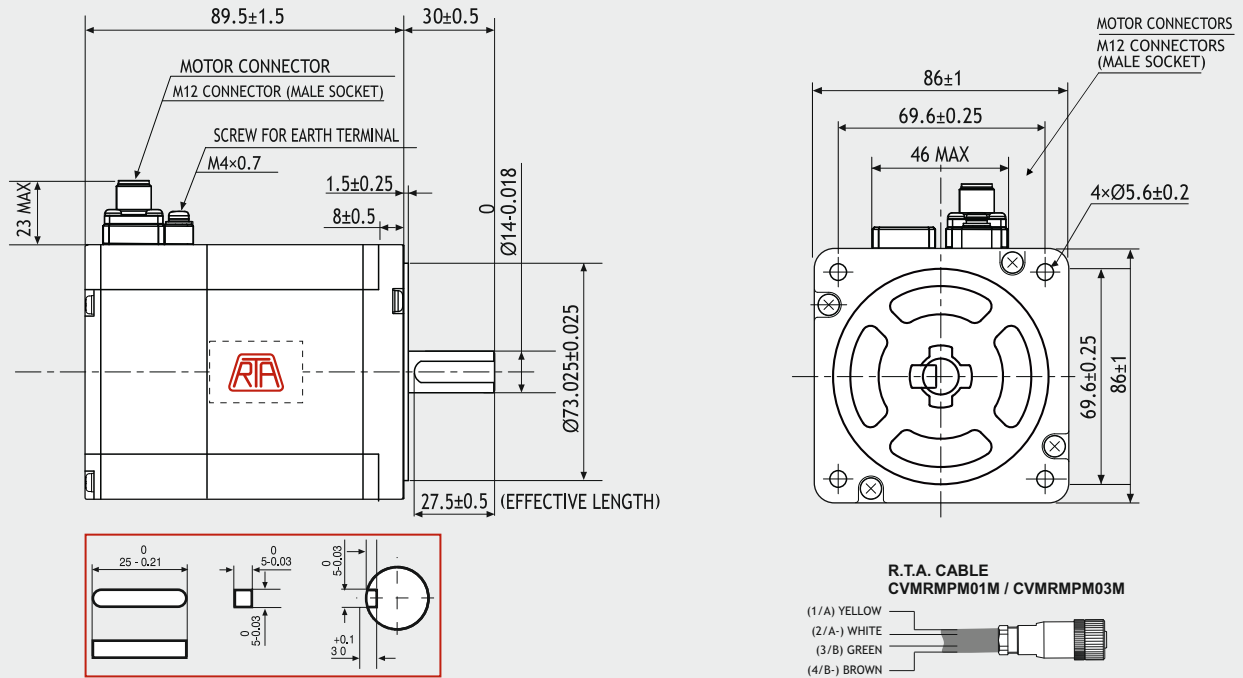


FEATURES

MODEL	RM 3R1M
BASIC STEP ANGLE	1.8 ± 0.09°
BIPOLAR CURRENT (Amp)	4
RESISTANCE (Ohm)	0.56
INDUCTANCE (mH)	3.7
BIPOLAR HOLDING TORQUE (Ncm)	360
ROTOR INERTIA (Kg ² x 10 ⁻⁷)	1480
THEORETICAL ACCELERATION (rad x sec. ⁻²)	24300
BACK E.M.F. (V/Krpm)	90
MASS (Kg)	1.95
INTERNATIONAL STANDARDS	UL, CSA, CE, RoHS
INSULATION VOLTAGE (V)	250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS	IP 54 - CLASS F
LEADS CODE	V


TORQUE/SPEED CURVE

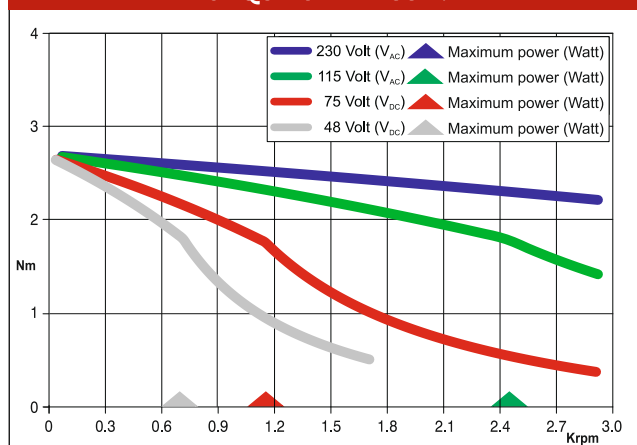

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

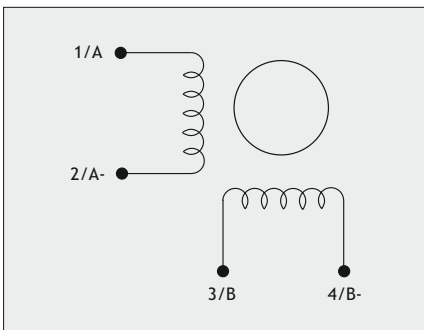

CE **UL** **US**

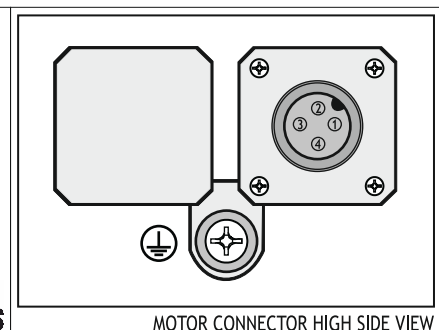

Suggested R.T.A. driver: 230 Vac X-PLUS series/230 Vac X-MIND series.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855 - Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitz Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, Local 1
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805 - Fax +34.936.334.595
www.rta-iberica.es