



RM 3R2M

Dimensions (Unit:mm)

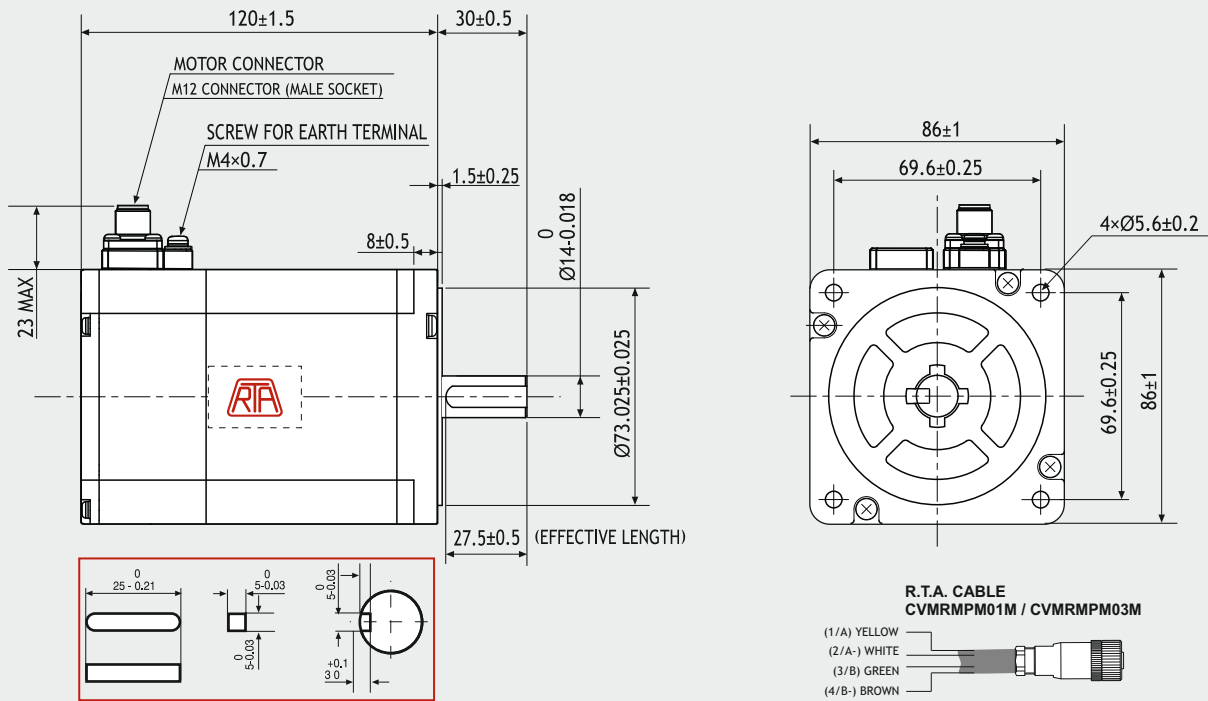

FEATURES		MODEL	RM 3R2M
BASIC STEP ANGLE			1.8 ± 0.09°
BIPOLAR CURRENT	(Amp)		4
RESISTANCE	(Ohm)		0.83
INDUCTANCE	(mH)		6.4
BIPOLAR HOLDING TORQUE	(Ncm)		700
ROTOR INERTIA	(Kg ² x 10 ⁻⁷)		3000
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		23330
BACK E.M.F.	(V/Krpm)		175
MASS	(Kg)		3.1
INTERNATIONAL STANDARDS			UL, CSA, CE, RoHS
INSULATION VOLTAGE	(V)		250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS			IP 54 - CLASS F
LEADS CODE			V

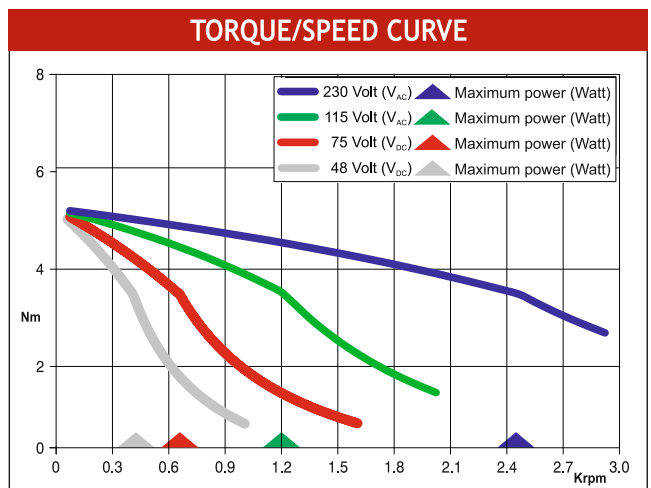

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)



Suggested R.T.A. driver: 230 Vac X-PLUS series/230 Vac X-MIND series.