


RM 3R3M


Dimensions (Unit:mm)

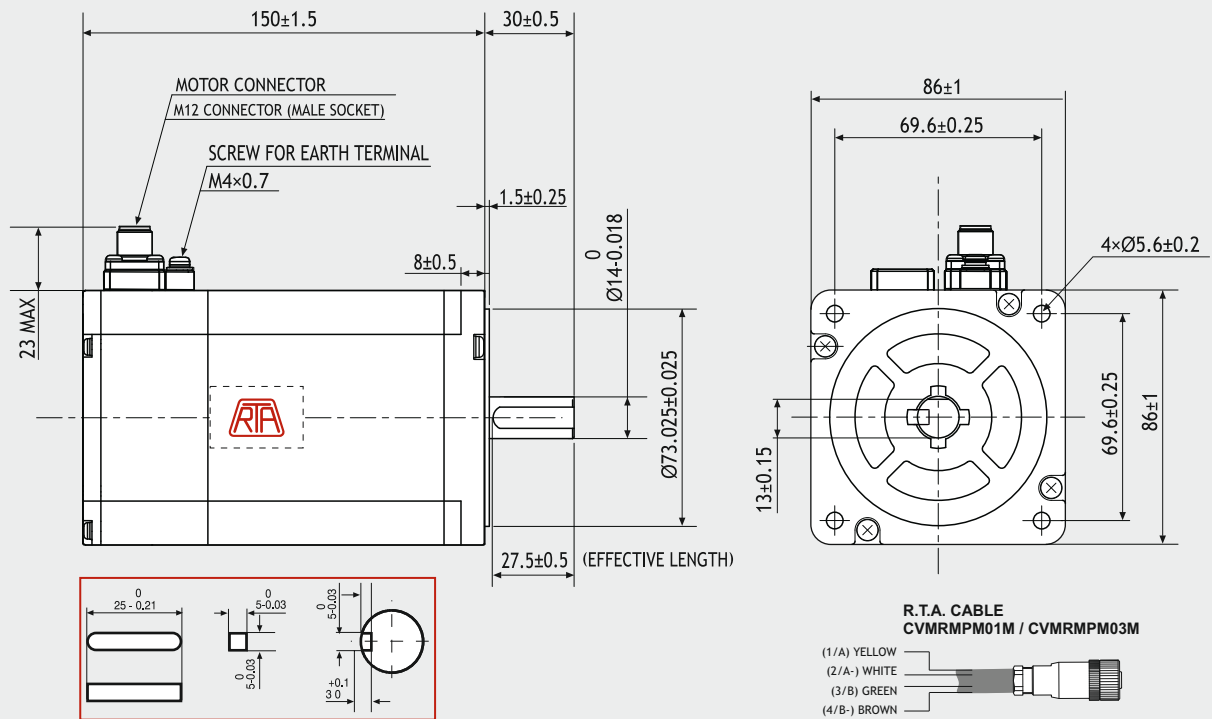


FEATURES

MODEL	RM 3R3M
BASIC STEP ANGLE	1.8 ± 0.09°
BIPOLAR CURRENT (Amp)	4
RESISTANCE (Ohm)	1
INDUCTANCE (mH)	7.9
BIPOLAR HOLDING TORQUE (Ncm)	920
ROTOR INERTIA (Kg·m ² × 10 ⁻⁷)	4500
THEORETICAL ACCELERATION (rad × sec. ⁻²)	20500
BACK E.M.F. (V/Krpm)	241
MASS (Kg)	4.2
INTERNATIONAL STANDARDS	UL, CSA, CE, RoHS
INSULATION VOLTAGE (V)	250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS	IP 54 - CLASS F
LEADS CODE	V


TORQUE/SPEED CURVE

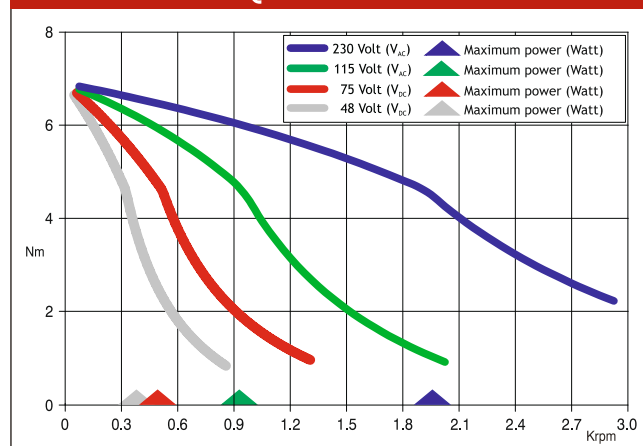

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO.,Ltd (JAPAN)

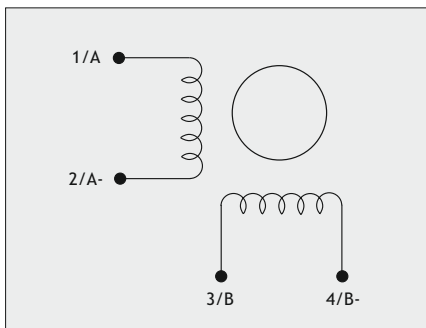

CE US

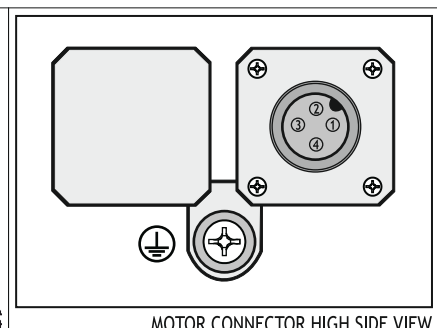

Suggested R.T.A. driver: 230 Vac X-PLUS series/230 Vac X-MIND series.