

# Y Branch-off joint



Low voltage 0,6/1 (1,2) kV, Telecommunication and Signalisation  
Inside / outside underground, above ground, underwater, in cable ducts


## Features

- Cable joint type tested according to: EN 50393:2006-11
- Resin type tested according to: IEC60455-3-8:2013
- Hydrolysis resistant polyurethane resin in transparent 2-component bag
- Strong transparent plastic shells
- Excellent resistance against UV, chemicals and alkalines
- Fully waterproof
- Installation instructions and protective gloves inclusive
- Very easy and quick installation
- Connectors and/or earthing kits available on request
- Other shell size dimensions available on request

## More info

[Download: Mixing instructions](#)

# Y Branch-off joint

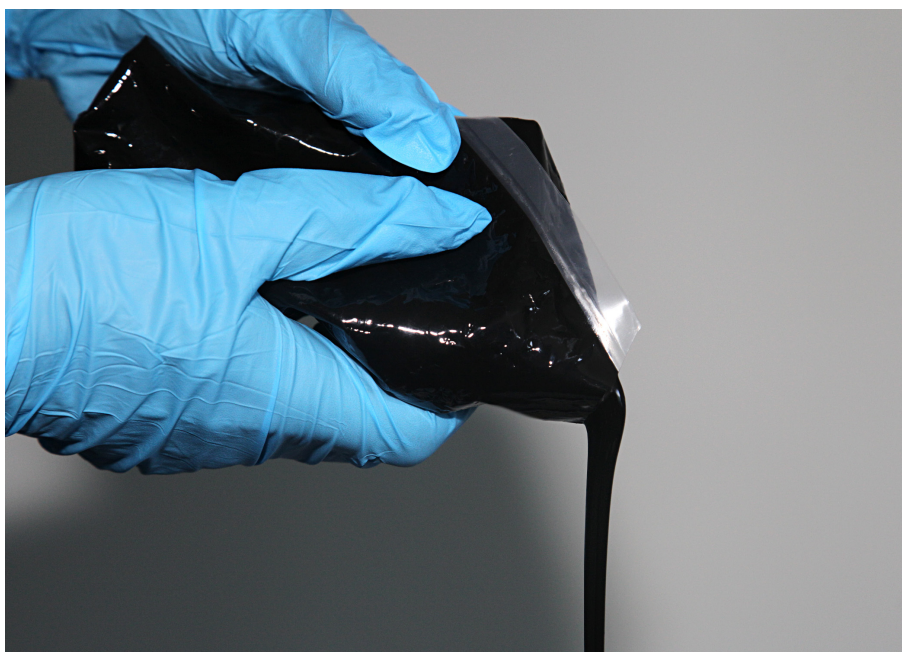

## Products

Art.nr.	Product Name	Cable diameter (mm)	Dimensions (mm)	Order unit
80169	Y Branch-off joint 4 x 2,5mm <sup>2</sup>	Ø 10 - 20	190 x 60	per piece
801692	Y Branch-off joint 4 x 6mm <sup>2</sup>	Ø 12 - 24	220 x 76	per piece
801694	Y Branch-off joint 4 x 16mm <sup>2</sup>	Ø 09 - 25	335 x 120	per piece
801696	Y Branch-off joint 4 x 35mm <sup>2</sup>	Ø 08 - 30	420 x 135	per piece