

40×40×28 mm

San Ace 40 9P_{type}



General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 599.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue Sensor Yellow
- Mass 52 g

Specifications

The models listed below **have ribs and pulse sensors.**

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109P0405H3013	5	4.5 to 5.5	0.68	3.4	8700	0.32 11.3	102.9 0.414	37	-20 to +70	40000/60°C (70000/40°C)
109P0405F3013			0.28	1.4	6700	0.244 8.6	58.8 0.236	30		60000/60°C (90000/40°C)
109P0412K3013	12	8 to 13.2	0.55	6.6	15500	0.59 20.8	340 1.365	50	-20 to +60	40000/60°C (70000/40°C)
109P0412J3013		7 to 13.2	0.35	4.2	12500	0.46 16.2	210 0.843	44		
109P0412G3013			0.31	3.72	11500	0.42 14.8	179 0.719	42		
109P0412B3013		7 to 13.8	0.28	3.36	10300	0.38 13.4	143 0.574	40		
109P0412H3013			0.195	2.34	8700	0.32 11.3	102.9 0.414	37	-20 to +70	60000/60°C (90000/40°C)
109P0412F3013			0.105	1.26	6700	0.244 8.6	58.8 0.236	30		
109P0412M3013		10.2 to 13.8	0.045	0.54	4100	0.15 5.3	21.6 0.087	20		
109P0424R3013			0.25	6	14000	0.51 18.0	263.4 1.057	47	-20 to +60	40000/60°C (70000/40°C)
109P0424J3013	24	12 to 26.4	0.18	4.32	12500	0.46 16.2	210 0.843	44		
109P0424G3013			0.19	4.56	11500	0.42 14.8	179 0.719	42		
109P0424B3013			0.13	3.12	10300	0.38 13.4	143 0.574	40		
109P0424H3013		12 to 27.6	0.095	2.28	8700	0.32 11.3	102.9 0.414	37	-20 to +70	60000/60°C (90000/40°C)
109P0424F3013		14 to 27.6	0.055	1.32	6700	0.244 8.6	58.8 0.236	30		

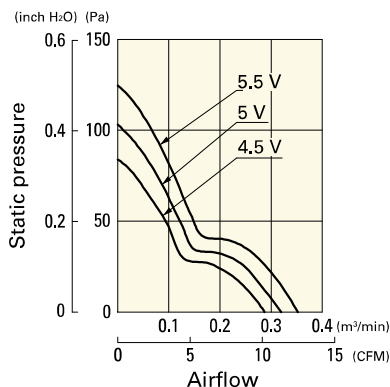
Note 1: Sensor and control options are available for selection. Refer to the table on pp. 621 to 622.

Note 2: The  mark indicates Short LeadTime Service applicable models. See p. 654 for details.

Airflow - Static Pressure Characteristics

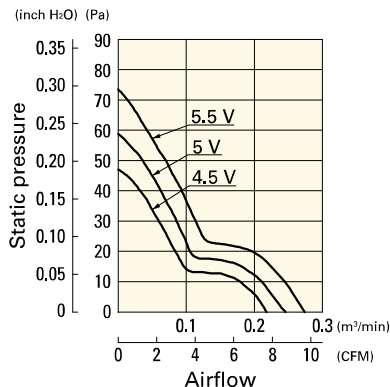
109P0405H3013 With pulse sensor

Operating voltage range



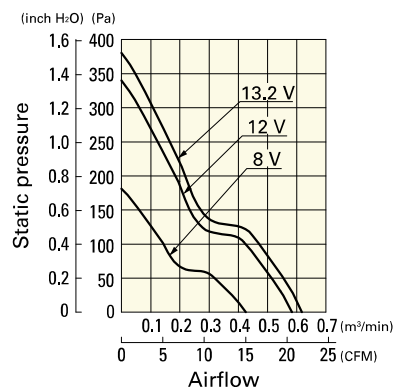
109P0405F3013 With pulse sensor

Operating voltage range



109P0412K3013 With pulse sensor

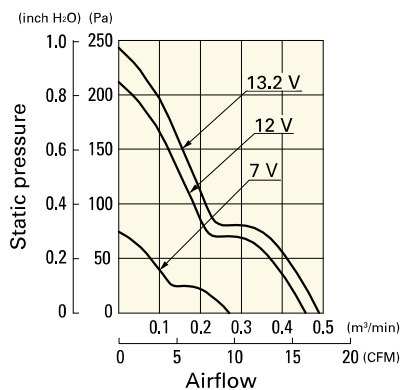
Operating voltage range



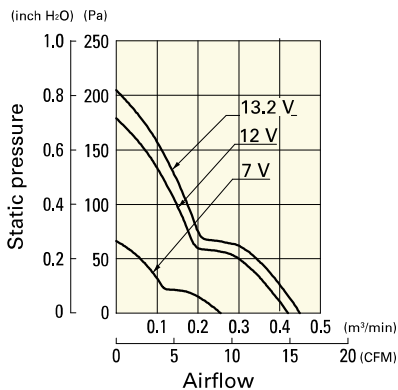
Airflow - Static Pressure Characteristics

109P0412J3013 With pulse sensor

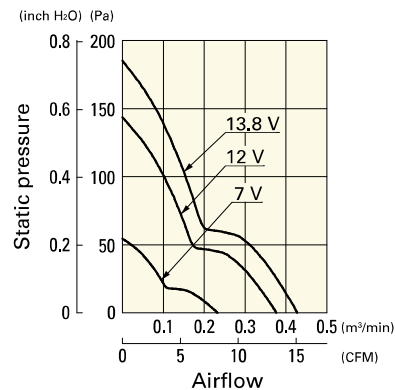
Operating voltage range


109P0412G3013 With pulse sensor

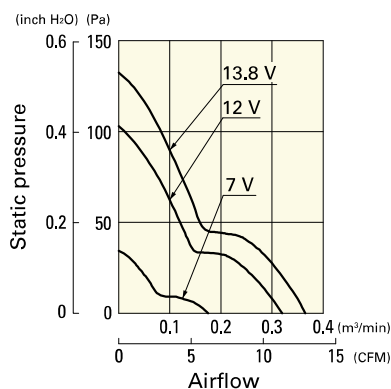
Operating voltage range


109P0412B3013 With pulse sensor

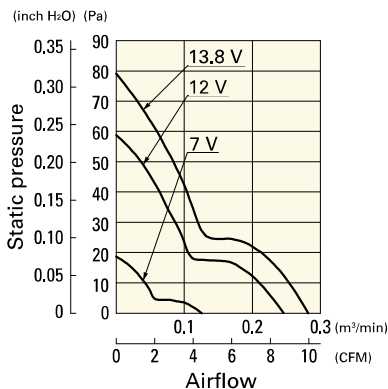
Operating voltage range


109P0412H3013 With pulse sensor

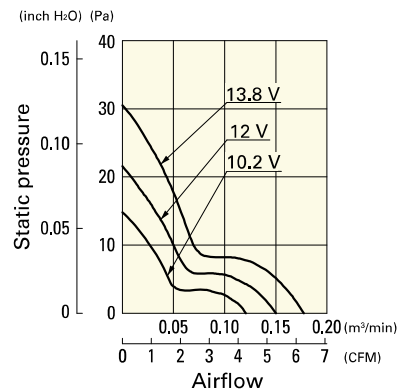
Operating voltage range


109P0412F3013 With pulse sensor

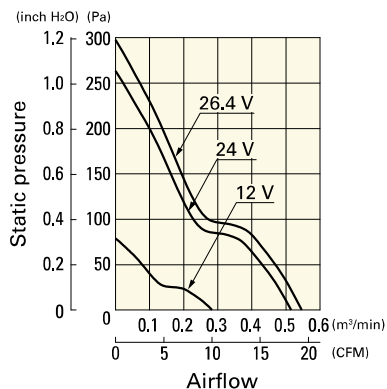
Operating voltage range


109P0412M3013 With pulse sensor

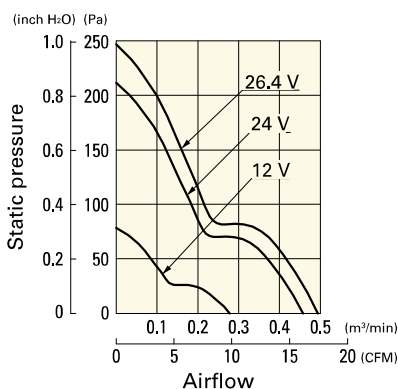
Operating voltage range


109P0424R3013 With pulse sensor

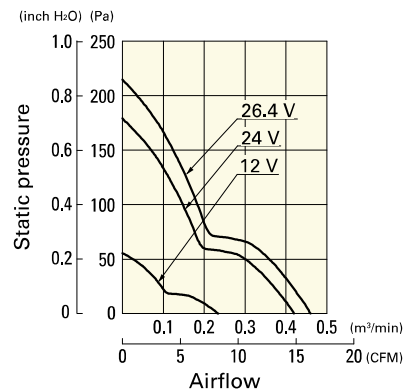
Operating voltage range


109P0424J3013 With pulse sensor

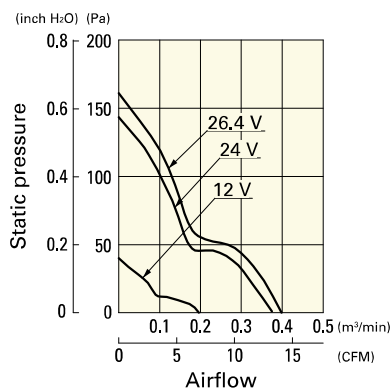
Operating voltage range


109P0424G3013 With pulse sensor

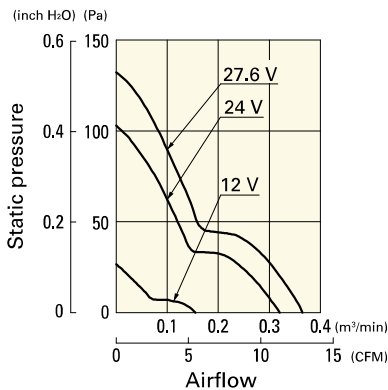
Operating voltage range


109P0424B3013 With pulse sensor

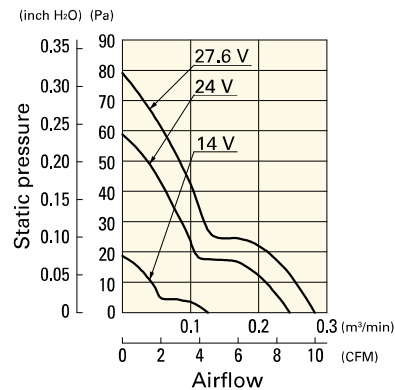
Operating voltage range


109P0424H3013 With pulse sensor

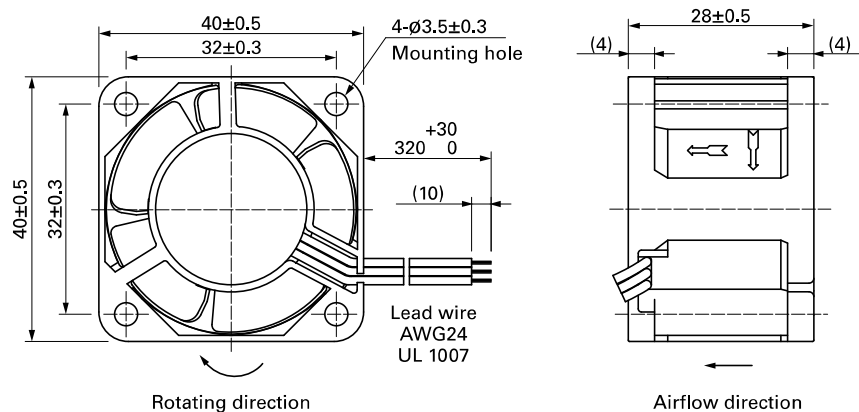
Operating voltage range


109P0424F3013 With pulse sensor

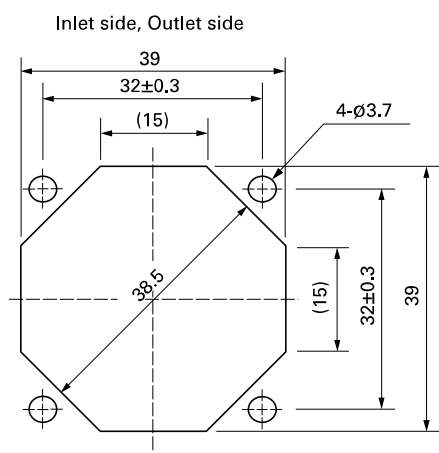
Operating voltage range



Dimensions (unit: mm)



Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)



Options

Finger guards

page: p. 584

Model no.: 109-059, 109-059H