


FUSIBILI CILINDRICI

Cylindrical fuses | Fusibles cylindriques

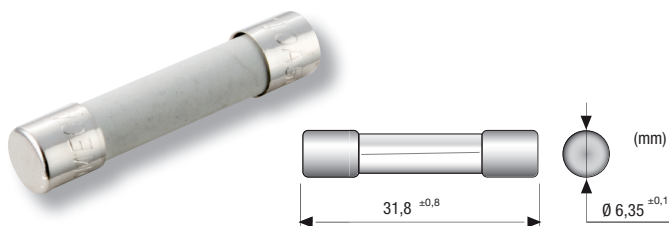

FUSIBILI 6,3x32 UFG

6,3x32 UFG fuses | Fusibles 6,3x32 UFG

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Corpo Ceramica	Body Ceramic	Corps Céramique
Cod. omologazione Bussmann ABC	Approval code Bussmann ABC	Code d'homologation Bussmann ABC
Norme riferimento UL 248-14	Standards UL 248-14	Normes UL 248-14





pag. 31



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai		
	100%	135%	200%
250 mA - 30 A	4 h min	60 min max	120 s max

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione V Voltage drop V Chute de tension V	Cap. rottura A Breaking capacity Pouvoir de coupure A
250 mA	UL	UFG632125	0,35	35
500 mA	UL	UFG632150	0,41	35
750 mA	UL	UFG632175	0,32	35
1 A	UL	UFG632210	0,30	35
1,5 A	UL	UFG632215	0,28	100
2 A	UL	UFG632220	0,31	100
2,5 A	UL	UFG632225	0,23	100
3 A	UL	UFG632230	0,14	100
4 A	UL	UFG632240	0,17	200
5 A	UL	UFG632250	0,22	200
6 A	UL	UFG632260	0,19	200
7 A	UL	UFG632270	0,17	200
8 A	UL	UFG632280	0,19	200
10 A	UL	UFG632310	0,15	200
12 A	UL	UFG632312	0,10	750
15 A	UL	UFG632315	0,10	750
20 A	UL	UFG632320	0,10	400
•25 A	UL	UFG632325	0,09	1000
•30 A	UL	UFG632330	0,09	1000

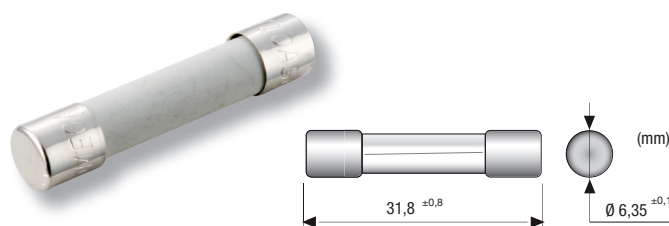

FUSIBILI 6,3x32 UTG

6,3x32 UTG fuses | Fusibles 6,3x32 UTG

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica T= ritardati	Characteristic T= time delay	Caractéristique T= temporisés
Tensione 250 V	Voltage 250 V	Tension 250 V
Corpo Ceramica	Body Ceramic	Corps Céramique
Cod. omologazione Bussmann MDA	Approval code Bussmann MDA	Code d'homologation Bussmann MDA
Norme riferimento UL 248-14	Standards UL 248-14	Normes UL 248-14



pag. 31



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai		
	100%	135%	200%
250 mA - 30 A	-	60 min max	120 s max

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione V Voltage drop V Chute de tension V	Cap. rottura A Breaking capacity Pouvoir de coupure A
250 mA	UL	UTG632125	4,00	35
500 mA	UL	UTG632150	1,42	35
750 mA	UL	UTG632175	1,31	35
1 A	UL	UTG632210	1,03	35
1,5 A	UL	UTG632215	0,691	100
2 A	UL	UTG632220	0,623	100
2,5 A	UL	UTG632225	0,213	200
3 A	UL	UTG632230	0,182	200
4 A	UL	UTG632240	0,162	200
5 A	UL	UTG632250	0,145	200
6 A	UL	UTG632260	0,141	200
7 A	UL	UTG632270	0,137	200
8 A	UL	UTG632280	0,134	200
10 A	UL	UTG632310	0,135	200
12 A	UL	UTG632312	0,128	750
15 A	UL	UTG632315	0,107	750
20 A	UL	UTG632320	0,095	1500
25 A	UL	UTG632325	0,105	1500
30 A	UL	UTG632330	0,110	1500

