


FUSIBILI CILINDRICI

Cylindrical fuses | Fusibles cylindriques

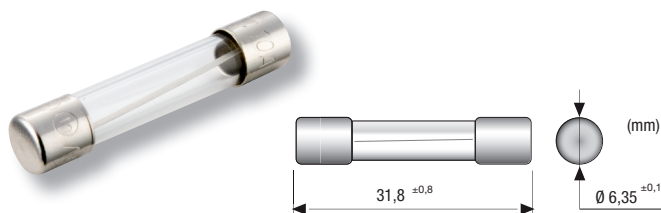

FUSIBILI 6,3x32 UF 6,3x32 UF fuses | Fusibles 6,3x32 UF

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann AGC	Approval code Bussmann AGC	Code d'homologation Bussmann AGC
Norme riferimento UL 248-14	Standards UL 248-14	Normes UL 248-14

pag. 30



TEMPI DI FUSIONE | Time current | Temps de fusion


Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai		
	110%	135%	200%
50 mA - 30 A	4 h min	60 min max	120 s max

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione V Voltage drop V Chute de tension V	Cap. rottura A Breaking capacity Pouvoir de coupure A
50 mA		UF632050	0,67	35
100 mA		UF632110	6	35
125 mA		UF632112	4,67	35
200 mA		UF632120	4,51	35
250 mA		UF632125	0,89	35
300 mA		UF632130	2,88	35
375 mA		UF632137	4,59	35
500 mA		UF632150	0,59	35
750 mA		UF632175	0,37	35
1 A		UF632210	0,31	35
1,25 A		UF632212	0,35	100
1,5 A		UF632215	0,27	100
2 A		UF632220	0,28	100
2,5 A		UF632225	0,31	100
3 A		UF632230	0,25	100
4 A		UF632240	0,22	200
5 A		UF632250	0,23	200
6 A		UF632260	0,23	200
8 A		UF632280	0,19	200
9 A		UF632290	0,18	200
10 A		UF632310	0,20	200
•15 A		UF632315	0,14	1000
•20 A		UF632320	0,12	1000
•25 A		UF632325	0,11	1000
•30 A		UF632330	0,12	1000

100 pz
100 pcs
100 pces

30 giorni
30 days
30 jours

• tensione 32 V
voltage 32 V
tension 32 V

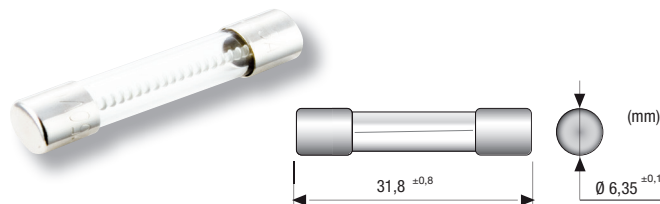

FUSIBILI 6,3x32 UT 6,3x32 UT fuses | Fusibles 6,3x32 UT

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica T= ritardati	Characteristic T= time delay	Caractéristique T= temporisés
Tensione 250 V	Voltage 250 V	Tension 250 V
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann MDL	Approval code Bussmann MDL	Code d'homologation Bussmann MDL
Norme riferimento UL 248-14	Standards UL 248-14	Normes UL 248-14

pag. 30



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai		
	100%	135%	200%
63 mA - 30 A	-	60 min max	120 s max
63 mA - 3 A	-	-	5 s min
4 A - 8 A	-	-	12 s min

Corrente nom. Rated current Courant nominal	Omologazioni Approvals Homologations	Codice Code Code	Caduta tensione V Voltage drop V Chute de tension V	Cap. rottura A Breaking capacity Pouvoir de coupure A
63 mA		UT632063	2,79	35
100 mA		UT632110	1,95	35
125 mA		UT632112	1,52	35
200 mA		UT632120	0,972	35
250 mA		UT632125	0,965	35
300 mA		UT632130	0,808	35
375 mA		UT632137	1,46	35
500 mA		UT632150	1,27	35
750 mA		UT632175	1,01	35
1 A		UT632210	0,995	35
1,25 A		UT632212	0,722	100
1,5 A		UT632215	0,721	100
2 A		UT632220	0,644	100
2,5 A		UT632225	0,410	100
3 A		UT632230	0,345	100
4 A		UT632240	0,187	200
5 A		UT632250	0,160	200
6 A		UT632260	0,155	200
7 A		UT632270	0,140	200
8 A		UT632280	0,119	200
• 9 A		UT632290	0,124	1000
•10 A		UT632310	0,114	1000
•15 A		UT632315	0,130	1000
•20 A		UT632320	0,530	1000
•25 A		UT632325	0,30	1000
•30 A		UT632330	0,40	1000

100 pz
100 pcs
100 pces

30 giorni
30 days
30 jours

• tensione 32 V
voltage 32 V
tension 32 V