



Material: PC Optics UL94 clear  
 Operating Temperature  $-60^{\circ}$   $+125^{\circ}$ C  
 ESD Protection

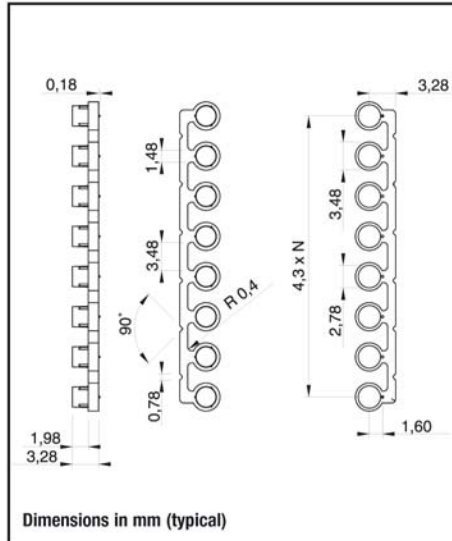

Code	Length (L)	Position
K5401	–	1
K5402	4,3	2
K5403	8,6	3
K5404	12,9	4
K5405	17,2	5
K5406	21,5	6
K5407	25,8	7
K5408	30,1	8

Hole panel: 2,85 mm   
 Panel Thickness: 2,00 mm max