



Series K14998

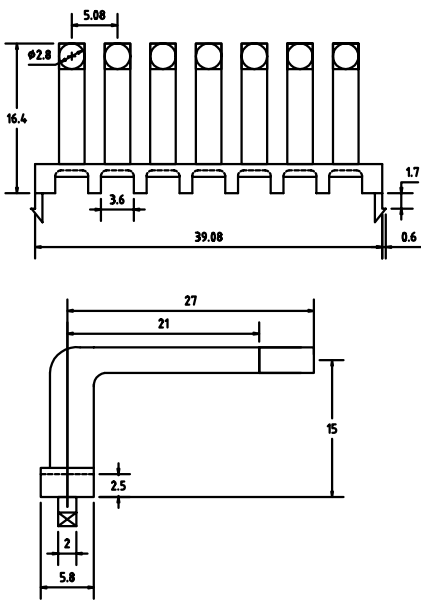


Dimensions in mm (typical)

Series KSI11

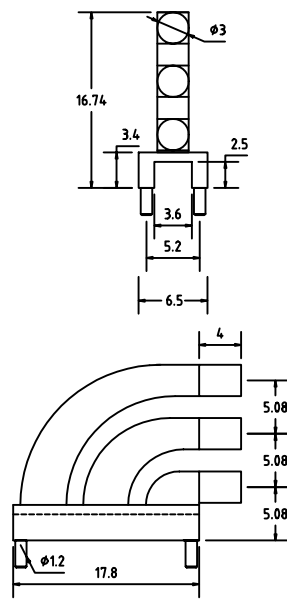

Dimensions in mm (typical)

Series KSI50

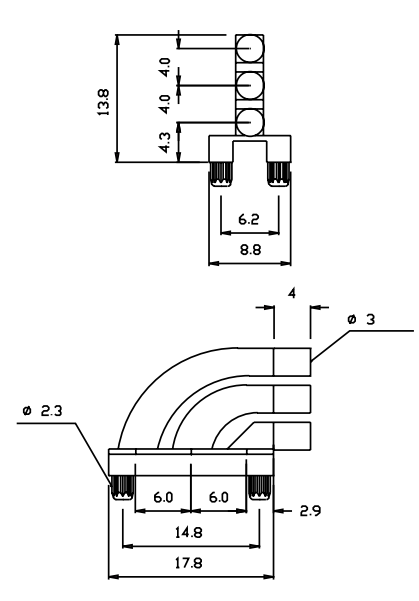

Dimensions in mm (typical)

RECOMMENDED LEDS:

Size	Color	Range intensity (mcd)
1206	All	7,5÷140
PLCC2	All	4,2÷72
0805	All	2÷60
0603	All	10÷60

BENEFITS

- ◆ ESD protection electrostatic discharge;
- ◆ High transmissivity, delivery maximum light transmission;
- ◆ Helps to eliminate mixed technology PCB processing;
- ◆ Secures to PCB or front panel by snap-in or press-fit;
- ◆ Wide viewing angle;
- ◆ Special shapes and symbols;
- ◆ Reduce insertion cost.

One of many applications

