


BATTERIE E PORTABATTERIE

Battery and battery holders | Piles et porte-piles

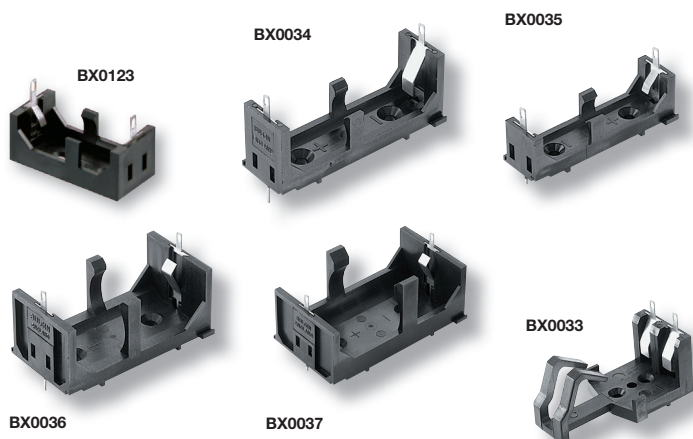

PORTABATTERIE PER CIRCUITO STAMPATO



Battery holders for printed circuit | Supports de piles pour circuit imprimé

Corpo Nylon caricato vetro UL94V-0	Body Glass filled nylon UL94V-0	Corps Nylon chargé verre UL94V-0
Contatti Argento nichelato	Contacts Nickel plated silver	Contacts Argent nickelé
Temperatura di lavoro -30°C +70°C	Operating temperature -30°C +70°C	Température de travail -30°C +70°C



Codice Code Code	Tipo batteria Battery type Type de pile	Dimensioni batteria Battery dimension Dimension de pile	N°poli N°poles N°pôles
BX0123	CR123	Ø17x34,5	1
BX0034	AAA (R03)	Ø10,5x44,5	1
BX0035	AA (R6)	Ø14,5x50,5	1
BX0036	C (R14)	Ø26,2x50	1
BX0037	D (R20)	Ø34,2x61,5	1
BX0033	PP3 (6R61)	L 26,5 X P 17,5 X H 48,5	1

Dimensioni | Dimensions | Dimensions

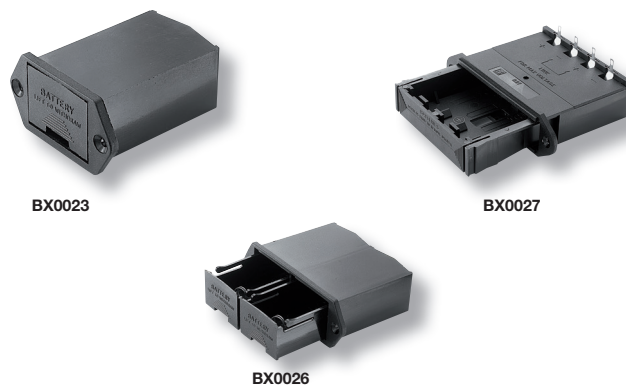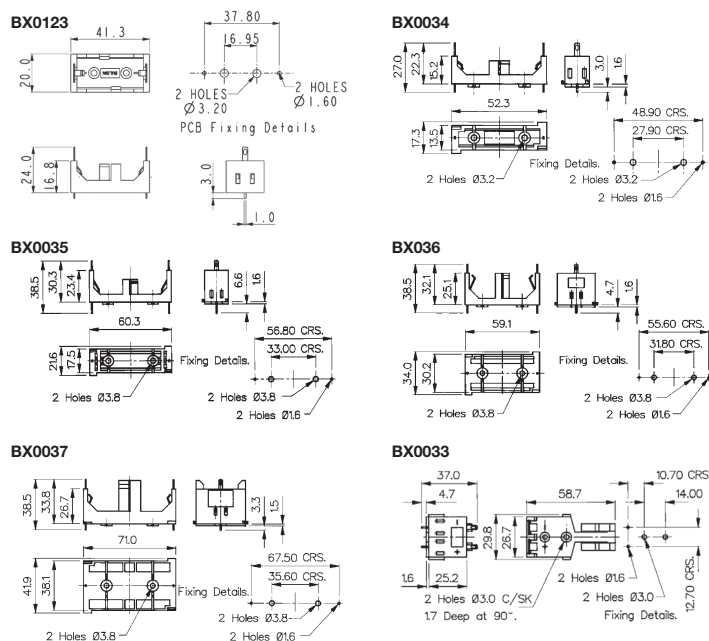

PORTABATTERIE DA PANNELLO


Battery holders panel mounting | Supports de piles pour panneau

Corpo Nylon caricato vetro UL94V-0	Body Glass filled nylon UL94V-0	Corps Nylon chargé verre UL94V-0
Contatti A saldare 2,8 bronzo stagnato	Contacts 2,8 solder tinned bronze	Contacts À souder 2,8 bronze étamé
Temperatura di lavoro -30°C +70°C	Operating temperature -30°C +70°C	Température de travail -30°C +70°C



Codice Code Code	Tipo batteria Battery type Type de pile	Dimensioni batteria Battery dimension Dimension de pile	N°poli N°poles N°pôles
BX0023	PP3 (6R61)	L26,5 x P17,5 x H48,5	1
BX0026	PP3 (6R61)	L26,5 x P17,5 x H48,5	2
BX0027	AA (R6)	Ø14,5 x 50,5	4

Dimensioni | Dimensions | Dimensions

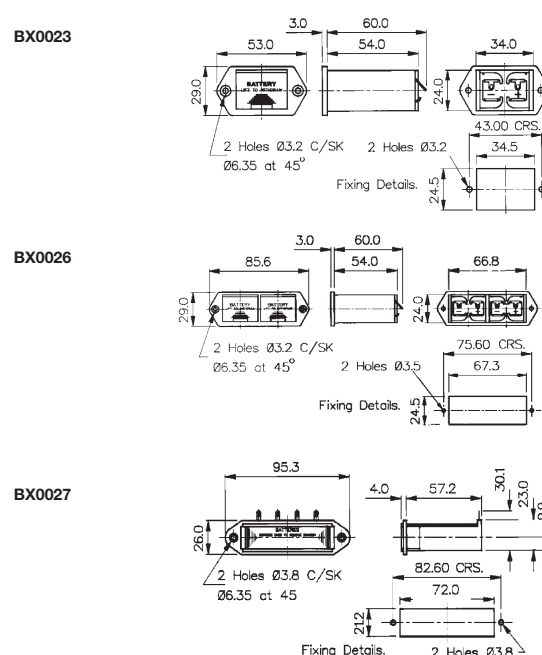

BATTERIE E PORTABATTERIE

Battery and battery holders | Piles et porte-piles



PORTABATTERIE

Battery holders | Porte-piles

Corpo

Nylon caricato vetro UL94V-0

Contatti

A saldare 2,8 bronzo stagnato
Ottone nichelato
(BX0016-17-18)

Temperatura di lavoro
-30°C +70°C

Body

Glass filled nylon UL94V-0

Contacts

2,8 solder tinned bronze
Nickel plated brass
(BX0016-17-18)

Operating temperature
-30°C +70°C

Corps

Nylon chargé verre UL94V-0

Contacts




À souder 2,8 bronze étamé
Laiton nickelé
(BX0016-17-18)

Température de travail
-30°C +70°C



Codice Code Code	Tipo batteria Battery type Type de pile	Dimensioni batteria Battery dimension Dimension de pile	N°poli N°poles N°pôles
BX0001	C (R14)	Ø26,2x50	1
BX0002	C (R14)	Ø26,2x50	2
BX0003	C (R14)	Ø26,2x50	3
BX0011	AA (R6)	Ø14,5x50,5	1
BX0012	AA (R6)	Ø14,5x50,5	2
BX0013	AA (R6)	Ø14,5x50,5	3
BX0016	D (R20)	Ø14,5x50,5	1
BX0017	D (R20)	Ø14,5x50,5	2
BX0018	D (R20)	Ø14,5x50,5	3

Dimensioni | Dimensions | Dimensions

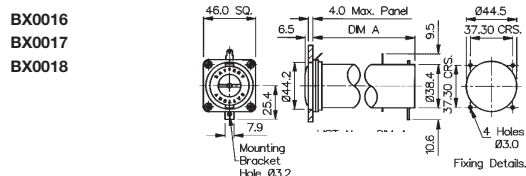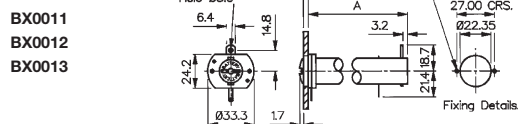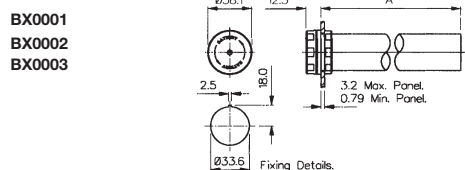

PORTABATTERIE

Battery holders | Porte-piles

Corpo

Nylon poliestere caricato vetro
UL94V-0
Polycarbonato (BXS011-12-13)

Temperatura di lavoro
-30°C +70°C

Grado di protezione
IP67

Body

Nylon glass filled polyester
UL94V-0
Polycarbonate (BXS011-12-13)

Operating temperature
-30°C +70°C

Sealing
IP67

Corps

Nylon polyester chargé verre
UL94V-0
Polycarbonate (BXS011-12-13)

Température de travail
-30°C +70°C

Indice de protection
IP67



Codice Code Code	Tipo batteria Battery type Type de pile	Dim. batteria Battery dim. Dim. de pile	N°poli N°poles N°pôles	Contatti Contacts Contact
BXS001	C (R14)	Ø26,2x50	1	Ottone stagnato - Tappo: argento nichelato
BXS002	C (R14)	Ø26,2x50	2	Brass tin plated - Cap: nickel silver
BXS003	C (R14)	Ø26,2x50	3	Laiton étamé - Capot: argent nickelé
BXS011	AA (R6)	Ø14,5x50,5	1	Posteriori: ottone stagnato - Ant. e tappo: argento nichelato
BXS012	AA (R6)	Ø14,5x50,5	2	Rear: brass tin plated - Front and cap: nickel silver
BXS013	AA (R6)	Ø14,5x50,5	3	Arrière: laiton étamé - Avant et capot: argent nickelé
BXS016	D (R20)	Ø34,2x61,5	1	Ottone nichelato
BXS017	D (R20)	Ø34,2x61,5	2	Nickel plated brass
BXS018	D (R20)	Ø34,2x61,5	3	Laiton nickelé

Dimensioni | Dimensions | Dimensions

