


103-H6701-0140

SANYO DENKI
SANMOTION

Dimensions (Unit:mm)

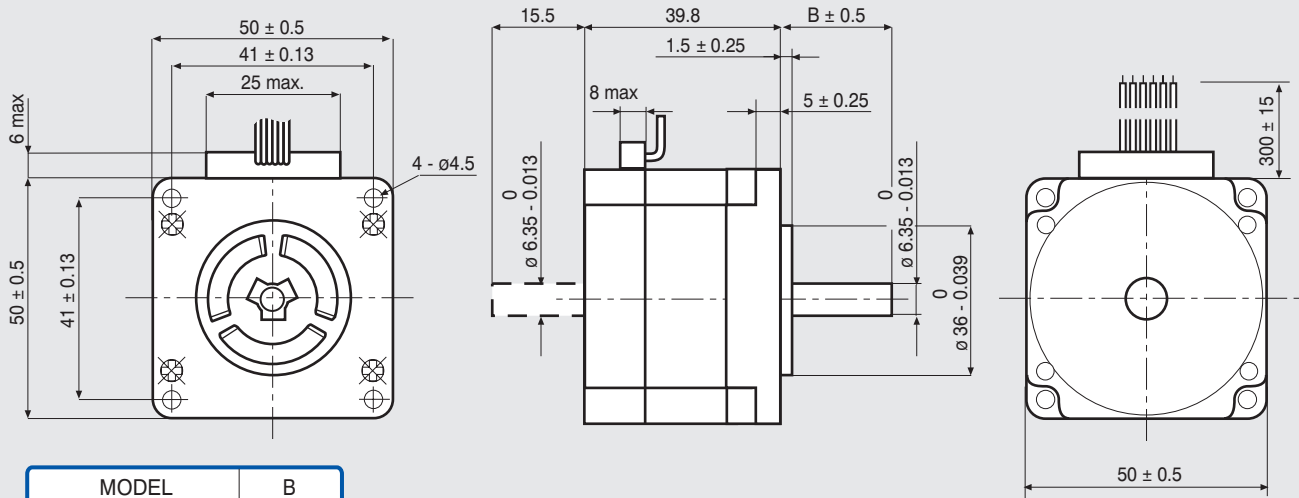


MODEL	B
103 - H6701 - 0140	20.6
103 - H6701 - 0113	28

FEATURES

MODEL	103-H6701-0140 (103-H6701-0113)
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	0.7 ^(*)
UNIPOLAR CURRENT (Amp)	1.0
RESISTANCE (Ohm)	4.3
INDUCTANCE (mH)	6.8
BIPOLAR HOLDING TORQUE (Ncm)	38
UNIPOLAR HOLDING TORQUE (Ncm)	28
ROTOR INERTIA (Kg·m ² × 10 ⁻⁷)	57
THEORETICAL ACCELERATION (rad × sec. ⁻²)	66000
BACK E.M.F. (V/Krpm)	20
MASS (Kg)	0.35
LEADS CODE	IV

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

TORQUE/SPEED CURVE

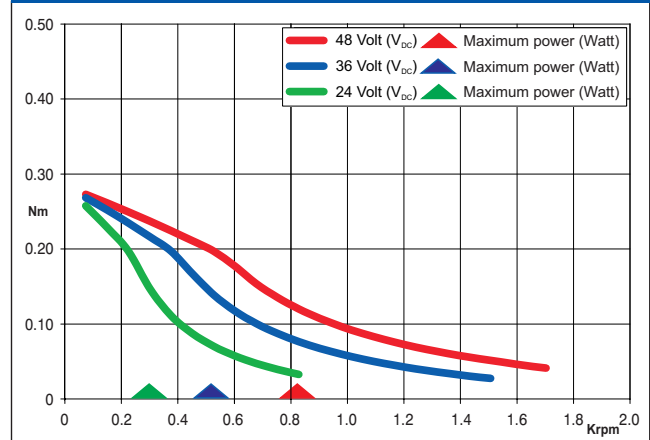

^(*)Bipolar series connection.
^(*)Collegamento bipolare serie.



IV

Suggested R.T.A. driver: BSD Series, CSD/A-CSD Series, NDC/A-NDC Series, HGD Series.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855 - Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Publitzer Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, 1° 3°
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805 - Fax +34.936.334.595
www.rta-iberica.es

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

EIMC - 10 - 14