


103-H7126-0140

SANYO DENKI
SANMOTION


Dimensions (Unit:mm)

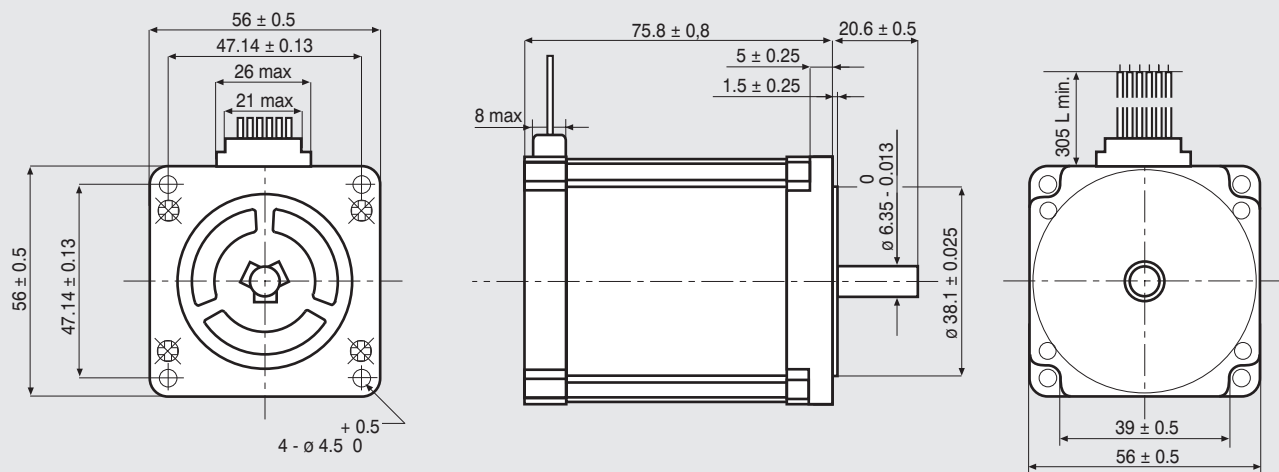

FEATURES



MODEL	103-H7126-0140
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	0.75 ^(*)
UNIPOLAR CURRENT (Amp)	1.0
RESISTANCE (Ohm)	8.6
INDUCTANCE (mH)	19
BIPOLAR HOLDING TORQUE (Ncm)	165
UNIPOLAR HOLDING TORQUE (Ncm)	130
ROTOR INERTIA (Kg·m ² × 10 ⁻⁷)	360
THEORETICAL ACCELERATION (rad × sec. ⁻²)	45800
BACK E.M.F. (V/Krpm)	92
MASS (Kg)	1
LEADS CODE	IV

TORQUE/SPEED CURVE

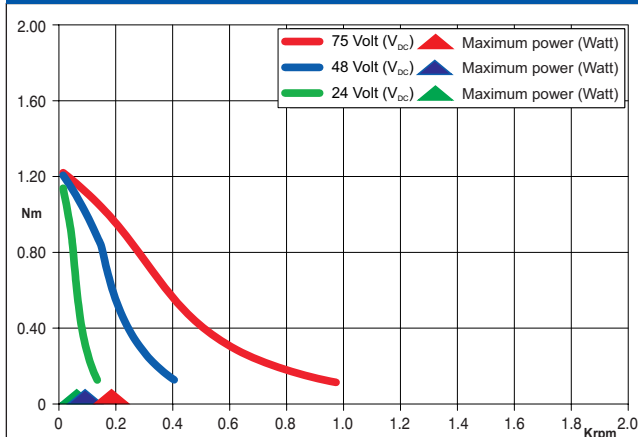

^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.

IV



Suggested R.T.A. driver: BSD Series, CSD/A-CSD Series, NDC/A-NDC Series, HGD Series.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855 - Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitz Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, 1° 3°
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805 - Fax +34.936.334.595
www.rta-iberica.es

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

EIMC - 10-14