


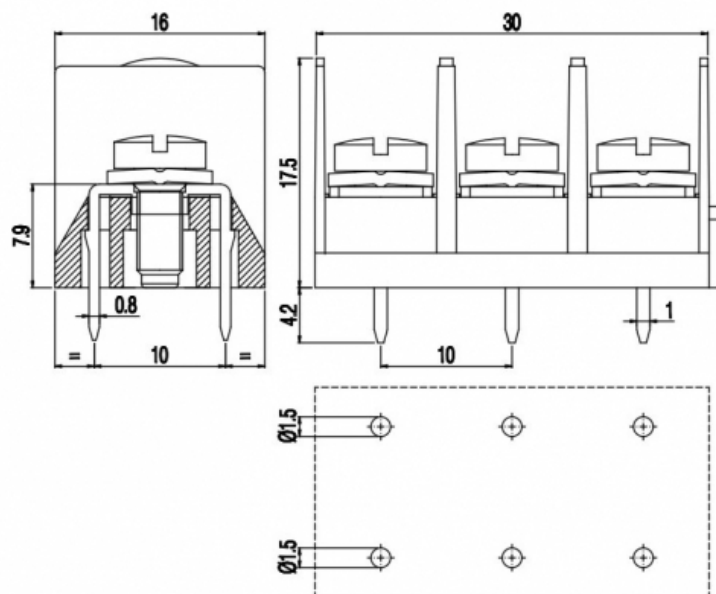

GENERAL INFORMATION

pitch:	10 mm
housing height:	17,50 mm
housing depth:	16 mm
dimensional class:	medium
wire section:	2x2.5 mm ² / 2x14 AWG
clamp opening size:	
wire stripping:	max 11 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	25A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3.5
max. torque:	0.8 Nm / 7.2 in.lbs

APPROVALS DATA



EN 60998-1
current: 25A
voltage: 750V
wire section: 2x2.5mm ²
torque: 0.8Nm
FILE: EQ203



EN 60998-1
current: 25A
voltage: 750V
wire section: 2x2.5mm ²
torque: 0.8Nm
40019721



UL 1059
15A factory / 20A field
600V
12÷24AWG
7.2Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Galvanized iron

AVAILABLE COLOURS



other colours: upon request

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MT212-10	N/A	N/A	N/A
3	MT213-10	N/A	N/A	N/A
..	MT21..-10	N/A	N/A	N/A