



PX 575



PX 579



PX 580

SPINE DA PANNELLO IEC power inlets | Prises mâles pour panneau

Tensione 250 V	Voltage 250 V	Tension 250 V
Corrente 10 A Europa / 15 A USA	Current 10 A Europe / 15 A USA	Courant 10 A Europe / 15 A USA
Contatti Ottone stagnato	Contacts Tinned brass	Contacts Laiton étamé
Corpo Nylon UL94-V0	Body Nylon UL94-V0	Corps Nylon UL94-V0
Norme riferimento EN60320-1	Standards EN60320-1	Normes EN60320-1
Cod. omologazione Bulgin PX0575 - PX0580 - PX0579	Approval code Bulgin PX0575 - PX0580 - PX0579	Code d'homologation Bulgin PX0575 - PX0580 - PX0579




Codice Code Code	Spessore pannello Panel thickness Épaisseur du panneau	Contatti Contacts Contacts	DIM "A"
------------------------	--------------------------------------------------------------	----------------------------------	---------


Fissaggio Snap-In Snap-In fixing Fixation à enclenchement			
* PX5751028	1	2,8	28
* PX5751528	1,5	2,8	28
* PX5752028	2	2,8	28
* PX5753028	3	2,8	28
* PX5751063	1	6,3	29,2
* PX5751563	1,5	6,3	29,2
* PX5752063	2	6,3	29,2
* PX5753063	3	6,3	29,2
Fissaggio a vite orizzontale Horizontal screw fixing Fixation horizontale à vis			
PX5800028	—	2,8	25,7
PX5800063	—	6,3	27,2
Fissaggio a vite verticale Vertical screw fixing Fixation verticale à vis			
• PX5790028	—	2,8	25,7
• PX5790063	—	6,3	27,2

Dimensioni | Dimensions | Dimensions

PX 575 - PX580

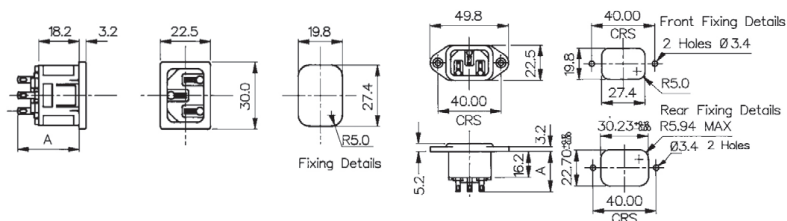

PX 579

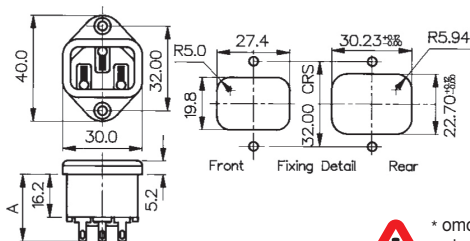

100 pz
100 pcs
100 pces



pronta
in stock
en stock



* omologato anche
also approved
homologué aussi



• omologato
approved
homologué

