


# TACT SWITCH(DIP TYPE)




1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

## STP-1230

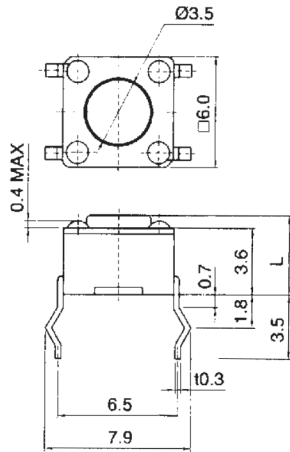

Model No.	Operating Force
STP-1230	160 ±50gf
STP-1230W	250±50gf

Model No.	STP 1230	STP 1230A	STP 1230B	STP 1230C	STP 1230D	STP 1230E	STP 1230F	STP 1230G	STP 1230J
L	4.3	5.0	9.5	8.0	13.0	7.3	8.5	7.0	17.0

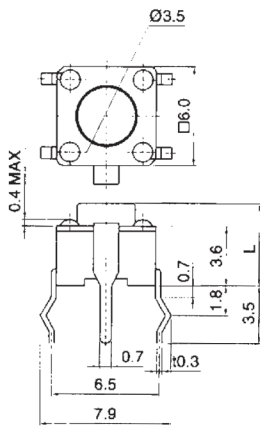


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

## STP-1232



Model No.	Operating Force
STP-1232	160 ±50gf
STP-1232W	250±50gf

Model No.	STP 1232	STP 1232A	STP 1232B	STP 1232C	STP 1232D	STP 1232E	STP 1232F	STP 1232G	STP 1232J
L	4.3	5.0	9.5	8.0	13.0	7.3	8.5	7.0	17.0

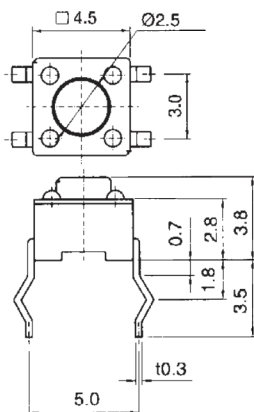

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

## STP-1145

