



# TACT SWITCH(DIP TYPE)

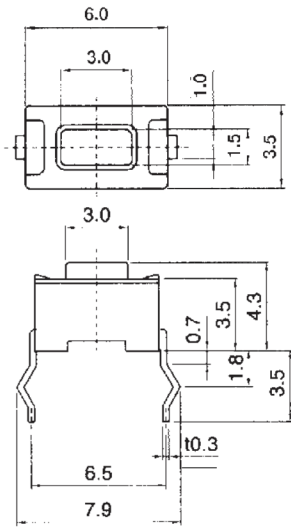


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles




## STP-1243



Model No.	Operating Force
STP-1243	180 ±50gf
STP-1243W	250±50gf

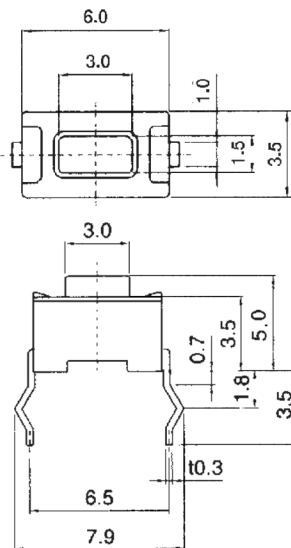


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles




## STP-1250



Model No.	Operating Force
STP-1250	180 ±50gf
STP-1250W	250±50gf

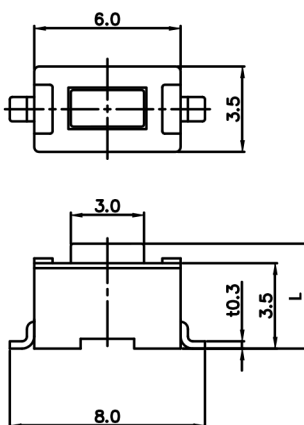

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles



## STP-1243S STP-1250S



Model No.	Stem(L)	Operating Force
STP-1243S	4.3mm	180 ±50gf
STP-1250S	5.0mm	180 ±50gf
STP-1243SW	4.3mm	250±50gf
STP-1250SW	5.0mm	250±50gf