

AQUAMAXI



Colors:

87


Underwater luminaire, comprising:

- ↳ Technopolymer housing
- ↳ Polycarbonate diffuser
- ↳ White 6500 K or RGB LEDs
- ↳ Stainless steel locking screws
- ↳ Stainless steel springs for fixing the luminaire to the outer housing
- ↳ Technopolymer outer housing for recessed wall mounting (version /R) complete with vanity trim, junction box, gaskets, connection hose and screws. Suitable for installations in concrete, tiled pools or in pools made with steel panels and liners.
- ↳ Complete with 3 metres H07RN8-F 2x6 mm² cable
- ↳ Must only function totally submerged in fresh water and they must only be powered by a low voltage of 12 V
- ↳ To be powered only with 12 V AC safety transformers, available as accessory
- ↳ IP68 up to 3 meters



Lamps

 LED n. 9 LED - 30 W

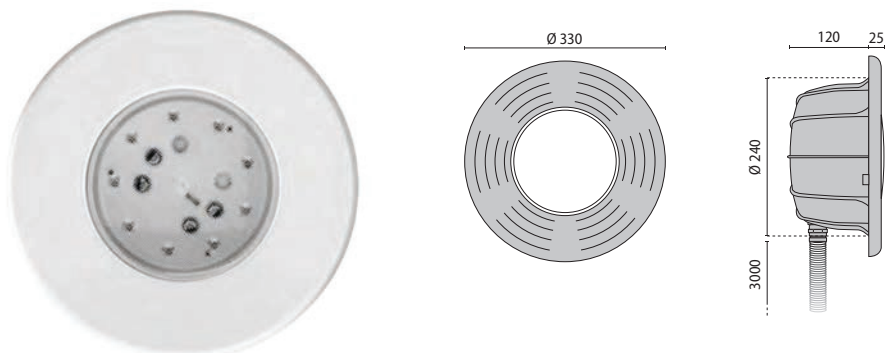

AQUAMAXI/R C/EW

IK07 2J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED + 3 m H07RN8 - F 2X6 mm²																			
n. 9 LED	30W	LED	-	87	III		6500	-	-	C/EW	-	1800 lm	-	50000 h	L70	-	06086120	¹	


AQUAMAXI/R RGB C/EW

IK07 2J xx5


LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
LED RGB + 3 m H07RN8 - F 2x6 mm²																			
n. 9 LED	30W	LED	-	87	III		rgb	-	-	C/EW	-	1015 lm	-	50000 h	L70	-	06086220	¹	

CONTROL GEAR

DESCRIPTION	COLOUR	PART NUMBER	EURO
AQUAMAXI			
A0128/T 1 x 350VA 240/12V safety transformer.	-	14094920	
A0646 Control unit capable of simultaneously managing colour changes for AQUA RGB, AQUA/R RGB and AQUA MAXI RGB. Complete with IP65 technopolymer housing, provision for antenna and remote control. Factory-set with most common lighting scenarios, selectable via remote control. Power supply shall be with 12V AC with safety transformers. The maximum number of fixtures allowed depends on the transformer's wattage, which cannot exceed 300W maximum power.	-	14168420	
A0647 Kit comprising an antenna + 5 metres of wire to connect to the RGB control unit. Makes it possible to hide the RGB control unit and maintain excellent reception of remote control signals.	-	14168520	



A0128/T





A0646



A0647

max 0,4 kg

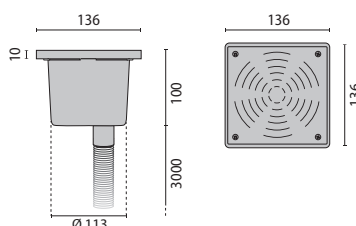

1) Power supply 12 V