


BOX LAMA Q

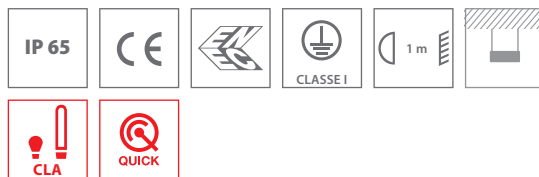

Colors:

94

Pendant luminaire, comprising:

- Polyester powder-painted die-cast aluminium housing
- Anti-aging silicone gasket
- Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- Galvanised steel M8 suspension hook
- The complete luminaire includes a box containing the power supply unit, extra pure polished and aluminium reflectors and tempered protective glass
- Reflector and glass to be ordered with the box
- Not suitable for use with PMMA refractors
- For continuous line power supply, luminaires can be installed with a second plug-socket outlet and supplied with through wiring



BOX LAMA Q



BOX LAMA Q
+CLA



Auxiliary lamp device for instant re-strike of an halogen B15d lamp MAX 250 W.



Ø 340



Ø 340



Ø 480



Ø 480



Ø 480



Complete unit

1A+1B = please order 2 codes

COMPONENTS

A luminaire


B reflector

Lamps

E40 1x150 W

E40 1x250 W

E40 1x400 W

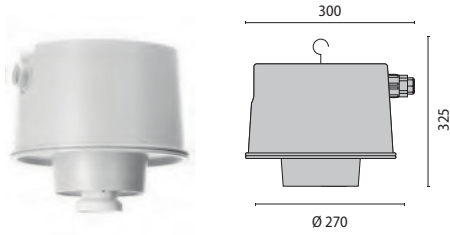

BOX LAMA Q

IK08 9J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
E40	1x150 W	SE	HSE	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05158194		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05157094		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05156994		
Discharge - magnetic ballast 230 V 50 Hz for HPI-BU Plus lamp																				
E40	1x250 W	ME	HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05156894		
E40	1x400 W	ME	HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05156794		

BOX LAMA Q+CLA

IK08 9J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz for HPI-BU Plus + CLA lamp																				
E40	1x250 W	ME	HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05166594		
E40	1x400 W	ME	HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05166694		
Discharge - magnetic ballast 230 V 50 HZ + CLA																				
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05166394		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	•	-	•	-	-	-	-	-	-	-	-	-	05166494		


max 10,8 kg

Ø 9÷14


H05RN-F 3G1
3x2,5 mm²

MANDATORY ACCESSORIES


DESCRIPTION	COLOUR	PART NUMBER	EURO
Ø 340			
A0119/34D 34D Smooth surface aluminium reflector (max 250W).	94	14440994	
A0176/34PR 34PR faceted surface aluminium reflector for greater visual comfort (max 250W).	-	14004710	
Ø 480			
A0119/48D Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	94	14441994	
A0119/48PR Reflector 48PR (250-400W) with prismatic surface, gives a diffused and comfortable light emission.	-	14053620	
A0119/48I Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	94	14442994	




A0176/34PR




A0119/34D



A0119/48PR



A0119/48D



A0119/48I

OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
Ø 340			
A0120 Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	14008820	
A0120 Frosted, tempered protection glass with aluminium clips and stainless steel springs for reflectors 34D - 34PR (Not for PMMA diffusers).	-	14020220	
A0081/34D Galvanised steel protective grid suitable for 34/D-PR	94	14322994	
Ø 480			
A0120 Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48I only.	-	14008920	
A0445 Protective tempered glass with technopolymer ring, aluminium clips and stainless steel spring (not for PMMA diffusers)	94	14089794	
A0445 Protective acid-etched tempered glass with technopolymer ring, aluminium clips and stainless steel spring (not for PMMA diffusers)	94	14089894	
A0199 Polycarbonate fastening cup with black technopolymer knurling tool for reflector 48/D-PR. Max power 250 W. Indicated for food industry installations	-	14010120	
A0080 Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48I only.	94	14321994	



A0120 - Ø 340 - Ø 480




A0445 - Ø 480



A0199 - Ø 480



A0180 - Ø 410
A0181 - Ø 570



A0080 - Ø 480
A0081 - Ø 340

SUPPLEMENTS

DESCRIPTION	COLOUR	PART NUMBER	EURO
(*) BOX LAMA Q			
A0339 Extra charge for plug and socket for continuous line power supply unit of BOX LAMA Q, with passing cable 3x2.5 mm ² . To be ordered with the device	-	14054420	

(*) To be ordered as a separate item along with fitting.



A0339