


GUELL 1

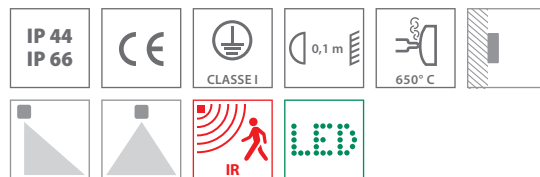

Colors:

94

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminium housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-aging silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- Passive infra-red motion sensor
- 3000 K and 5000 K available on request




GUELL 1
S/W
A/W

GUELL 1 DETEK
S/W
A/W

Lamps


	LED	n. 1 LED - 26 W
	LED	n. 1 LED - 39 W
	LED	n. 1 LED - 58 W
	LED	n. 1 LED - 76 W

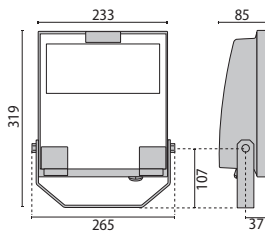

GUELL 1 A/W

IK07 3J xx5


LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 1 LED	26 W	-	-	94	I		4000	•	-	A40/W	-	3093 lm	2319 lm	150000 h	L70	-	06107894		
n. 1 LED	39 W	-	-	94	I		4000	•	-	A40/W	-	4859 lm	3522 lm	150000 h	L70	-	06106994		
n. 1 LED	58 W	-	-	94	I		4000	•	-	A40/W	-	6917 lm	4544 lm	150000 h	L70	-	06106694		
n. 1 LED	76 W	LED	-	94	I		4000	•	-	A40/W	-	8856 lm	5705 lm	70000 h	L70	-	06138894		

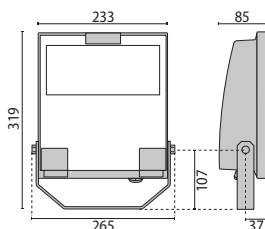

GUELL 1 S/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 1 LED	26 W	-	-	94	I		4000	•	-	S/W	-	3093 lm	2352 lm	150000 h	L70	-	06106094		
n. 1 LED	39 W	-	-	94	I		4000	•	-	S/W	-	4859 lm	3601 lm	150000 h	L70	-	06105794		
n. 1 LED	58 W	-	-	94	I		4000	•	-	S/W	-	6917 lm	4795 lm	150000 h	L70	-	06105494		
n. 1 LED	76 W	LED	-	94	I		4000	•	-	S/W	-	8856 lm	5901 lm	70000 h	L70	-	06139194		

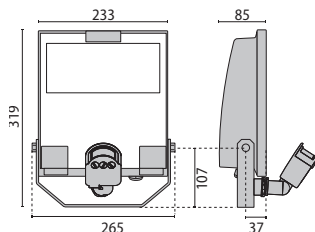


GUELL 1 DETEK A/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 1 LED	58 W	-	-	94	I		4000	•	-	A40/W	-	6917 lm	4544 lm	150000 h	L70	-	06114894		



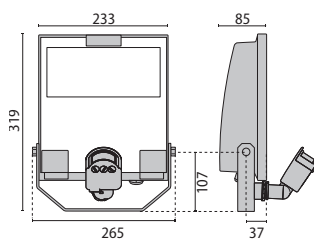

GUELL 1 DE TEK S/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Power LED 220/240 V 50/60 Hz																			
n. 1 LED	58 W	-	-	94	I	4000	•	-	S/W	-	6917 lm	4795 lm	150000 h	L70	-	06119994			



OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
GUELL 1			
A0652 Louvre GUELL 1 Asymmetrical	-	14173120	
A0651 Louvre GUELL 1 Symmetrical	-	14173020	
A0653 Soft glass GUELL 1	94	14173294	
A0650 Protective grid GUELL 1	-	14172902	
A0661 Connection box IP 66	-	14174220	
A0654/500 Wall support 500 mm GUELL 1/2	94	14173394	
A0654/1000 Wall support 1000 mm GUELL 1/2	94	14173494	
A0668/1 Single pole top support GUELL 1	94	14453194	
A0668/2 Double pole top support GUELL 1	94	14453294	




A0652

A0651

A0653

A0650

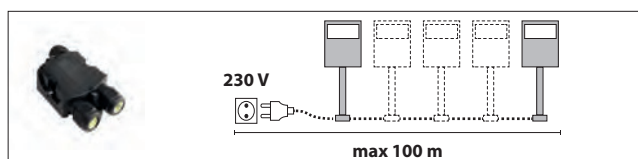

A0661

Continuous mounted luminaire



A0654/500

A0654/1000

A0668/1

A0668/2

