



Colors:



Weatherproof luminaire for T5 and T8 lamps, comprising:

- Polycarbonate housing
- UV stabilised transparent polycarbonate diffuser
- Reflector made of white (UV-resistant) painted steel sheet used also as electrical component tray
- Polyurethane foam gasket
- Parallel-compensated luminaires
- Clip in technopolymer reinforced with fibreglass
- Stainless steel springs for quick ceiling mount
- Self-extinguishing V2-UL94 housing and diffuser, glow wire 850 °C



IKE
T5 1x S/EW





IKE
T5 2x S/EW



IKE
T8 1x S/EW



IKE
T8 2x S/EW

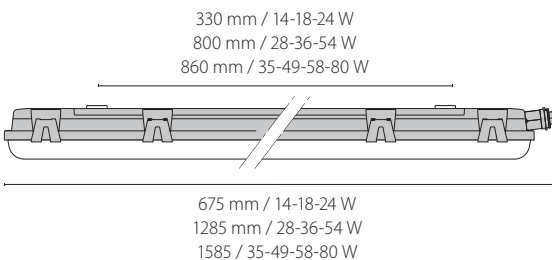

Lamps			I [mm]	L [mm]
	G13	1x18 W	330	675
	G13	1x36 W	800	1285
	G13	1x58 W	860	1585
	G13	2x18 W	330	675
	G13	2x36 W	800	1285
	G13	2x58 W	860	1585
	G5	1x14 W	330	675
	G5	1x24 W	330	675
	G5	1x28 W	800	1285
	G5	1x35 W	860	1585
	G5	1x49 W	860	1585
	G5	1x54 W	800	1285
	G5	1x80 W	860	1585
	G5	2x14 W	330	675
	G5	2x28 W	800	1285
	G5	2x35 W	860	1585

IKE T5 1X S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Fluorescent - electronic ballast 220/240 V 50/60 Hz																			
G5	1x14 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223090		
G5	1x24 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223990		
G5	1x28 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223190		
G5	1x35 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223290		
G5	1x49 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05224190		
G5	1x54 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05224090		
G5	1x80 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05224290		

IKE T5 2X S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Fluorescent - electronic ballast 220/240 V 50/60 Hz																			
G5	2x14 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223390		
G5	2x28 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223490		
G5	2x35 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05223590		

IKE T8 1X S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Fluorescent - electronic ballast 220/240 V 50/60 Hz																			
G13	1x18 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221490		
G13	1x36 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221590		
G13	1x58 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221690		
Fluorescent - magnetic ballast 230 V 50 Hz																			
G13	1x18 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05220890		
G13	1x36 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05220990		
G13	1x58 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05221090		

IKE T8 2X S/EW

IK09 12J xx7


LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Fluorescent - electronic ballast 220/240 V 50/60 Hz																			
G13	2x18 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221790		
G13	2x36 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221890		
G13	2x58 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	05221990		
Fluorescent - magnetic ballast 230 V 50 Hz																			
G13	2x18 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05221190		
G13	2x36 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05221290		
G13	2x58 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	05221390		

OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
IKE			
A0412 Set of 60 anti-tamper stainless steel self-threading screws.	-	14082920	
IKE - 1285 mm (28-36-54 W)			
A0116 Galvanized steel protection grills, to be fixed on ceiling.	95	14430995	
IKE - 1585 mm (35-49-58-80 W)			
A0116 Galvanized steel protection grills, to be fixed on ceiling	95	14431995	




A0412



A0116

max 4,6 kg




OK




NO



NO



PG 13,5
Ø 6÷11



H05RN-F 3G1
3x2,5 mm²