

Colors:

94

Range of wall-mount floodlights, in two sizes, comprising:

- Polyester powder-painted die-cast aluminium housing
- Flat tempered glass diffuser
- Extra pure polished aluminium reflectors
- Anti-aging silicone gasket
- Fully integrated technopolymer trim hinged to the housing
- Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
- Stainless steel external screws
- Powder coated steel bracket



WIN 01



WIN 01  
A/W



WIN 01  
S/W



WIN 01  
C/I



WIN 01  
WR



WIN 02



WIN 02  
A/I




WIN 02  
S/M



WIN 02  
C/I

#### Lamps


	E40	1x150 W
	E40	1x250 W
	E40	1x250 W
	E40	1x400 W
	E40	1x400 W
	Fc2	1x250 W
	G12	1x35 W
	G12	1x70 W
	G12	1x150 W
	RX7S	1x70 W
	RX7S	1x150 W



### WIN 01 A/W

IK08 5J xx5


LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0.9$	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Discharge - magnetic ballast 230 V 50 Hz</b>																			
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A25/W	-	-	-	-	-	-	<b>05126394</b>		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/W	-	-	-	-	-	-	<b>05226094</b>		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	A25/W	-	-	-	-	-	-	<b>07014594</b>		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A25/W	-	-	-	-	-	-	<b>05126494</b>		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/W	-	-	-	-	-	-	<b>05226194</b>		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	A25/W	-	-	-	-	-	-	<b>07014694</b>		

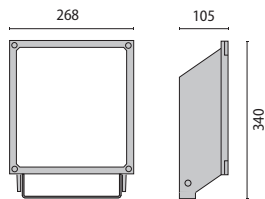

### WIN 01 S/W

IK08 5J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0.9$	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Discharge - magnetic ballast 230 V 50 Hz</b>																			
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	S/W	-	-	-	-	-	-	<b>05144894</b>		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	S/W	-	-	-	-	-	-	<b>07017294</b>		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	S/W	-	-	-	-	-	-	<b>05144994</b>		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	S/W	-	-	-	-	-	-	<b>07017394</b>		

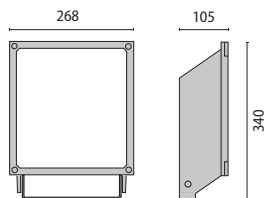


### WIN 01 C/I

IK08 5J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0.9$	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Discharge - magnetic ballast 230 V 50 Hz</b>																			
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	<b>05126594</b>		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	C/I	-	-	-	-	-	-	<b>07014794</b>		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	<b>05126694</b>		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	C/I	-	-	-	-	-	-	<b>07014894</b>		


K) When Kelvin degree information is provided, the fixture is complete with lamp.

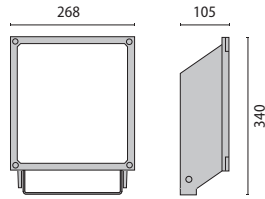

## WIN 01 WR

IK08 5J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0,9$	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Discharge - magnetic ballast 230 V 50 Hz</b>																			
G12	1x35 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	<b>05286994</b>		
G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	<b>05246794</b>		
G12	1x150 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	<b>05246894</b>		




## WIN 02 A/I

IK08 6J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0,9$	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Discharge - magnetic ballast 230 V 50 Hz</b>																			
E40	1x150 W	ST-MT	HST-HIT	94	I	•	-	•	-	A35/I	-	-	-	-	-	-	<b>05144094</b>		
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	A35/I	-	-	-	-	-	-	<b>05144194</b>		
E40	1x250 W	ST	HST	94	I	•	2000	•	-	A35/I	-	-	-	-	-	-	<b>07043794</b>		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	•	-	A35/I	-	-	-	-	-	-	<b>05144294</b>		
E40	1x400 W	ST	HST	94	I	•	2000	•	-	A35/I	-	-	-	-	-	-	<b>07044794</b>		
<b>Discharge - magnetic ballast 230 V 50 Hz for HPI-T Plus lamp</b>																			
E40	1x250 W	MT	HIT-CE	94	I	•	-	•	-	A35/I	-	-	-	-	-	-	<b>05144394</b>		
E40	1x250 W	MT	HIT-CE	94	I	•	4500	•	-	A35/I	-	-	-	-	-	-	<b>07018494</b>		
E40	1x400 W	MT	HIT-CE	94	I	•	-	•	-	A35/I	-	-	-	-	-	-	<b>05144494</b>		
E40	1x400 W	MT	HIT-CE	94	I	•	4500	•	-	A35/I	-	-	-	-	-	-	<b>07018594</b>		

K) When Kelvin degree information is provided, the fixture is complete with lamp.

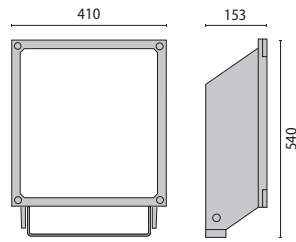

## WIN 02 S/M

IK08 6J xx5


LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0.9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
------------	---------	-------	-----	----------------	-------	--	--------	--------------------------	-----	-------	---------------	-----------------------------	---------------------------	----------	---	----	-------------	---------	------

### Discharge - magnetic ballast 230 V 50 Hz

E40	1x150 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	-	<b>05143494</b>		
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	-	<b>05143594</b>		
E40	1x250 W	ST	HST	94	I	•	2000	•	-	S/M	-	-	-	-	-	-	-	<b>07043694</b>		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	-	<b>05143694</b>		
E40	1x400 W	ST	HST	94	I	•	2000	•	-	S/M	-	-	-	-	-	-	-	<b>07044694</b>		

### Discharge - magnetic ballast 230 V 50 Hz for HPI-T Plus lamp

E40	1x250 W	MT	HIT-CE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	-	<b>05143794</b>		
E40	1x250 W	MT	HIT-CE	94	I	•	4500	•	-	S/M	-	-	-	-	-	-	-	<b>07018094</b>		
E40	1x400 W	MT	HIT-CE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	-	<b>05143894</b>		
E40	1x400 W	MT	HIT-CE	94	I	•	4500	•	-	S/M	-	-	-	-	-	-	-	<b>07018194</b>		

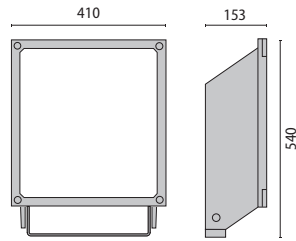

## WIN 02 C/I

IK08 6J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS $\phi$ $\geq 0.9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
------------	---------	-------	-----	----------------	-------	--	--------	--------------------------	-----	-------	---------------	-----------------------------	---------------------------	----------	---	----	-------------	---------	------

### Discharge - magnetic ballast 230 V 50 Hz


Fc2	1x250 W	MD	HIT-DE	94	I	-	-	•	-	C/I	-	-	-	-	-	-	-	<b>05144694</b>		
-----	---------	----	--------	----	---	---	---	---	---	-----	---	---	---	---	---	---	---	-----------------	--	--

K) When Kelvin degree information is provided, the fixture is complete with lamp.


## OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
<b>WIN</b>			
A0105 Prismatic glass suitable for LEO/C fittings only.	93	<b>14396993</b>	
A0259/1 Single WIN 01 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.	94	<b>14029094</b>	
<b>WIN 01</b>			
A0286 External anti-glare louvre painted aluminium grey (WIN 01).	94	<b>14043294</b>	
A0283 WIN 01 frosted glass optional replacement for standard clear glass.	-	<b>14042920</b>	
A0285 External steel cowl painted aluminium grey (WIN 01).	94	<b>14043194</b>	
A0308/1 Single WIN 01 pole top fitting and outreach arm for 60-76mm poles. Aluminium pole top and steel outreach arm.	94	<b>14048894</b>	
A0308/2/90° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	<b>14049094</b>	
A0308/2-180° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 180°. Finished painted aluminium grey.	94	<b>14048994</b>	
A0308/3-90° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	<b>14049194</b>	
A0325/3-120° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 120°. Finished painted aluminium grey.	94	<b>14050294</b>	
A0308/4-90° Four WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	<b>14049294</b>	
A0287/500 500mm wall mounting extension arm in sheet steel painted aluminium grey (WIN 01).	94	<b>14043394</b>	
A0305 WIN 01 mounting bracket in stainless steel.	04	<b>14048104</b>	
A0259/2 Die cast aluminium sliding pole clamp painted aluminium grey suitable for n° 2 5Stars1 luminaires on Ø60-76mm poles.	94	<b>14047194</b>	


DESCRIPTION	COLOUR	PART NUMBER	EURO
<b>WIN 02</b>			
A0294 External anti-glare louvre painted aluminium grey (WIN 02).	94	<b>14045694</b>	
A0296 WIN 02 frosted glass optional replacement for standard clear glass.	-	<b>14045820</b>	
A0295 External steel cowl painted aluminium grey (WIN 02).	94	<b>14045794</b>	
A0363/1 Aluminium pole top and steel outreach arm. Painted aluminium grey (WIN 02).	94	<b>14068694</b>	
A0363/2-90° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	<b>14068794</b>	
A0363/2-180° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 180°. Painted aluminium grey.	94	<b>14068894</b>	
A0363/3-90° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	<b>14068994</b>	
A0363/3-120° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 120°. Painted aluminium grey.	94	<b>14069094</b>	
A0363/4 Four WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles. Painted aluminium grey.	94	<b>14069194</b>	
A0347 Long bracket for ceiling mounting, painted aluminium grey (WIN 02).	94	<b>14057394</b>	
A0299 WIN 02 strengthening bracket. Suitable for one floodlight single point fixing M12 screw in centre of the bracket.	04	<b>14046120</b>	
A0307 1000mm extension arm in heavy gauge steel, painted aluminium grey (WIN 02).	94	<b>14048694</b>	
A0320/1 Single pole top mounting, for Ø60-76mm poles, painted aluminium grey	94	<b>14051294</b>	
A0320/2 Double pole top mounting, Ø60-76mm poles, painted aluminium grey	94	<b>14051394</b>	

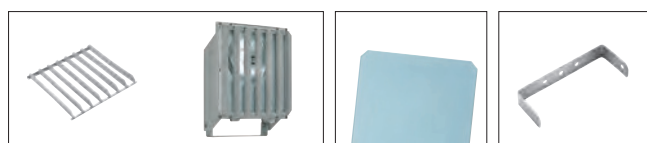


**A0286**                      **A0283**                      **A0305-A0306**

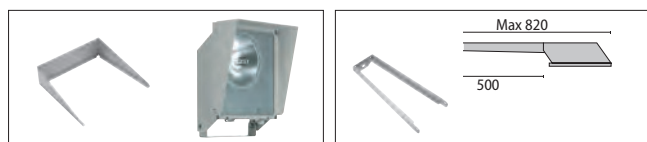


**A0285**                      **A0287/500**

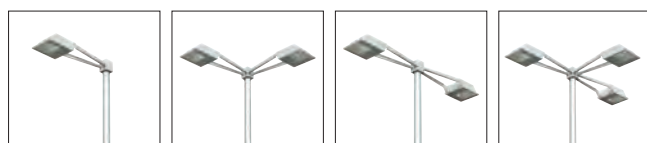

**A0308/1**                      **A0308/2 - 90°**                      **A0308/2 - 180°**                      **A0308/3 - 90°**

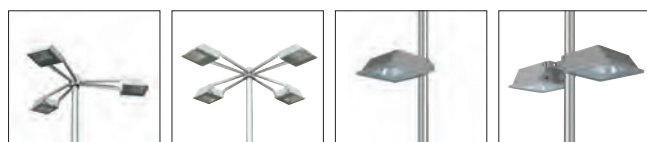


**A0308/3 - 120°**                      **A0308/4**                      **A0259/1**                      **A0259/2**

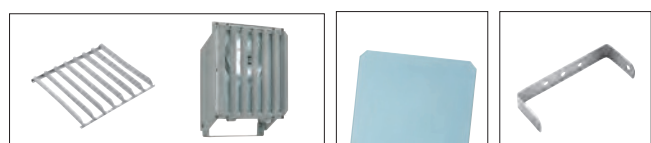


**A0294**                      **A0296**                      **A0347**



**A0295**                      **A0363**                      **A0307**

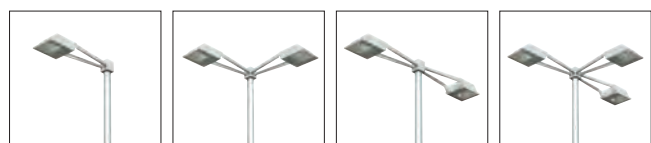


**A0363/1**                      **A0363/2 - 90°**                      **A0363/2 - 180°**                      **A0363/3 - 90°**

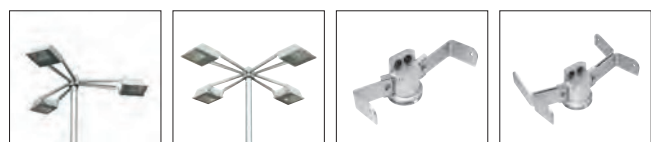

**A0363/3 - 120°**                      **A0363/4**                      **A0320/1**                      **A0320/2**

## SUPPLEMENTS


DESCRIPTION	COLOUR	PART NUMBER	EURO
<b>(*) WIN 01</b>			
A0284 WIN 01 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	<b>14043020</b>	
A0306 WIN 01 supplement for stainless steel mounting bracket to be ordered together with the fitting.	04	<b>14048204</b>	
<b>(*) WIN 02</b>			
A0297 WIN 02 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	<b>14045920</b>	



**A0284** - WIN 01  
**A0297** - WIN 02

(\*) To be ordered as a separate item along with fitting.

### WIN 01

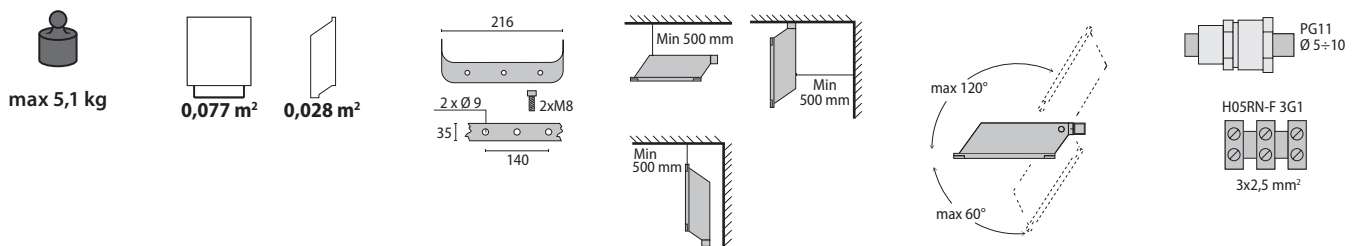

### WIN 02

