
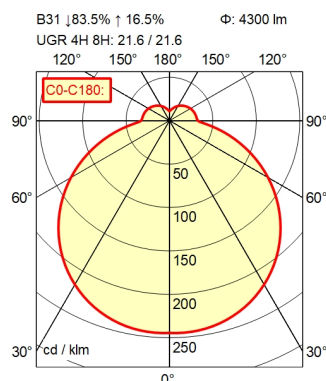


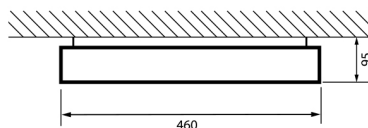

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

EAN

Weight without/incl. packaging

Packaging dimensions

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 44 W

approx. 4.300 lm

approx. 97 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 84 %

< 3 SDCM

without

≤ 4.700 cd/m²

≤ 22

I

Switchable

External

Sheet metal; Painted; White

Acrylic (PMMA); White opal

Direct power supply

mounted version

Ceiling mounted

4013330147846

ca. 1,9 kg; 2,2 kg

ca. 460 mm; 460 mm; 110 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear