

TERES PRO

ID 14

With a distinctly **architectural vocation**, **TERES PRO** represents the latest and most **sophisticated inspiration for spotlight with a compact and slim body** equipped with a driver completely hidden into the track. The **TERES PRO ZOOM** version thanks to the **adjustable light beam** is the best solution when flexibility is required to enlighten spaces and objects modifying the accent light to wide beam by a simple touch. **The PRO ART version** responds to the demanding lighting **requirements of museum and exhibition spaces**: the gobos allow you to design clearly and precisely geometrical rays lights, perfect to enhance sculptures and paintings.

☑ Features

- Direct emission
- UGR<19
- IP 40

💡 Led

- 3000K/4000K
- >113 lm/W
- CRI>90/CRI>95
- Eye safety: RGO/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- In track driver
- CoB LED technology
- PC lens 15°-24°-36°-50°
- ZOOM lens from 25° to 60°

📦 Body

- Die-cast aluminum with epoxy powder coating

🌈 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

★ Certifications

- CE Conformity
- Energy efficiency E
- 5 years warranty
- ETL Certification


⇄ Related products

- Teres (p. 224)
- Teres Exte (p. 231)
- Teres Micro Zoom (p. 178)

📦 On request

- DALI - code D*
- Bluetooth - code BT*
- 2700K - code: K27*
- 5000K - code: K5*


* Where available

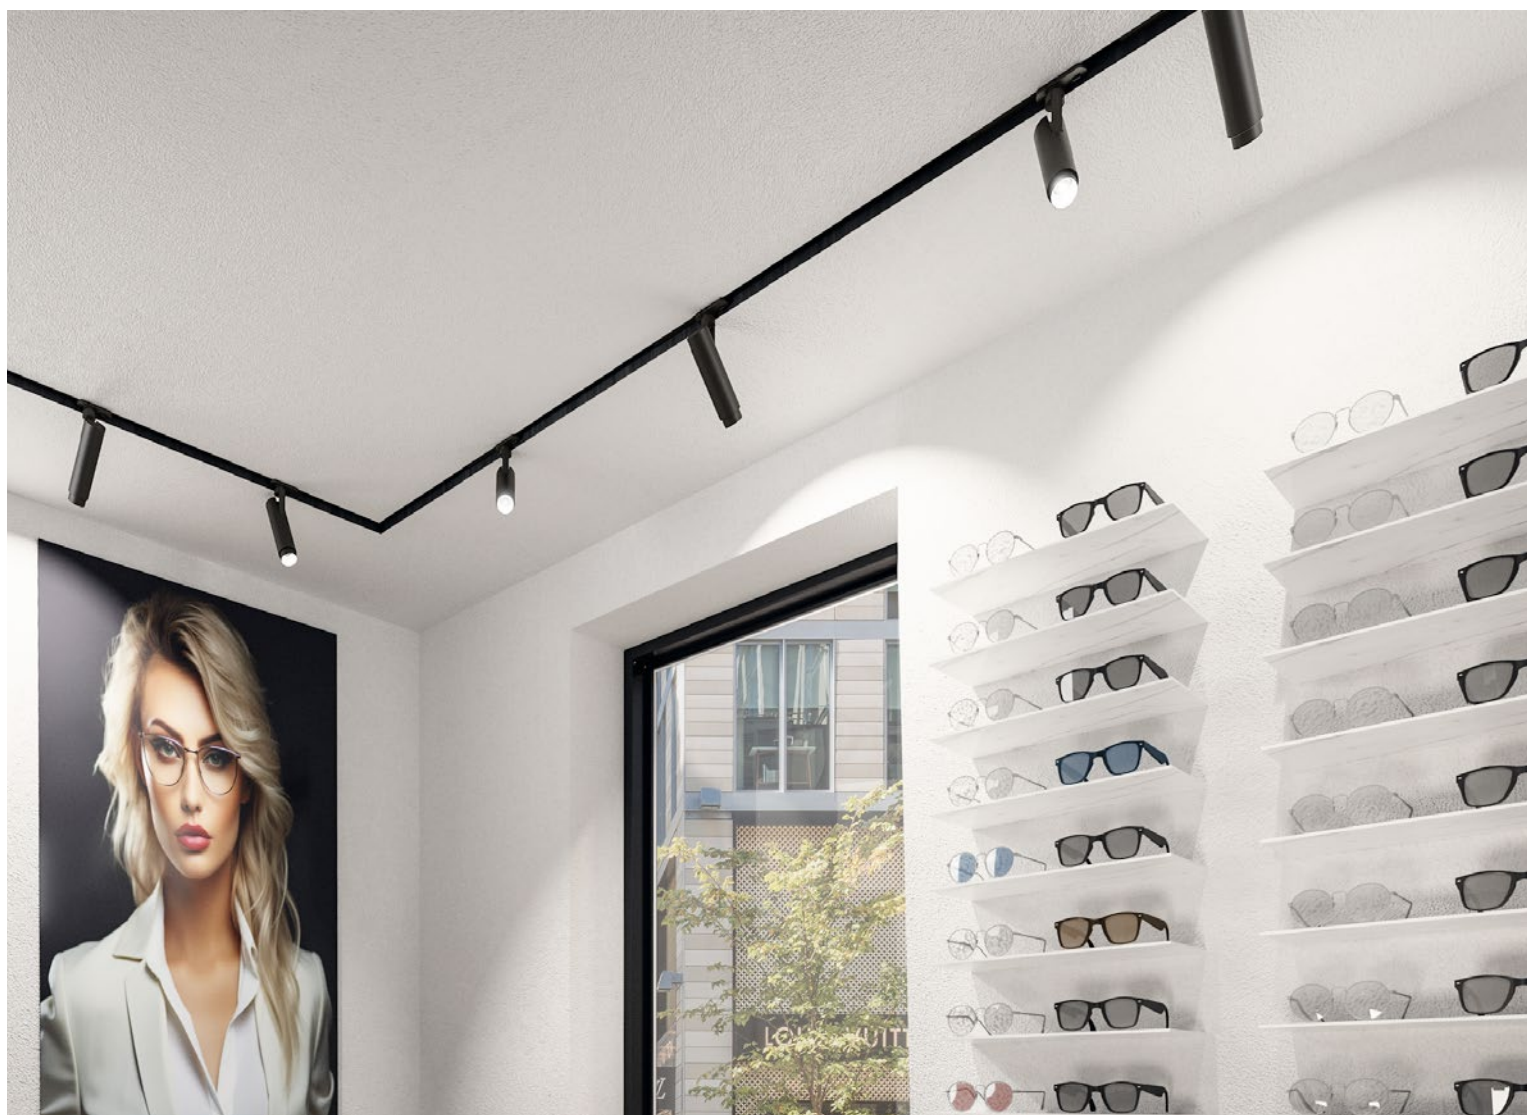



TERES PRO PC

PC lens 15°-24°-36°-50°.



→50←



UGR<19

IP 40



Cod. 4000K	Led	lm	Ømm
14PC15K415	15W 15°	1695	50
14PC15K424	15W 24°	1695	50
14PC15K436	15W 36°	1695	50
14PC15K450	15W 50°	1695	50
14PC21K415	21W 15°	2373	50
14PC21K424	21W 24°	2373	50
14PC21K436	21W 36°	2373	50
14PC21K450	21W 50°	2373	50

Cod. 3000K	Led	lm	Ømm
14PC15K315	15W 15°	1530	50
14PC15K324	15W 24°	1530	50
14PC15K336	15W 36°	1530	50
14PC15K350	15W 50°	1530	50
14PC21K315	21W 15°	2135	50
14PC21K324	21W 24°	2135	50
14PC21K336	21W 36°	2135	50
14PC21K350	21W 50°	2135	50

TERES PRO ZOOM

PC adjustable lens 10°-45°.



→50←



UGR<19

IP 40





Cod. 4000K	Led	lm	Ømm
14ZM15K4	15W 10°-45°	1653	50
14ZM21K4	21W 10°-45°	2295	50

Cod. 3000K	Led	lm	Ømm
14ZM15K3	15W 10°-45°	1487	50
14ZM21K3	21W 10°-45°	2065	50

TERES PRO ART

PC lens adjustable 25°-36° with flaps, CRI>95.



IP 40



Cod. 4000K	Led	lm	Ømm
14GB15K4	15W 25°-36°	1635	50
14GB21K4	21W 25°-36°	2297	50

Cod. 3000K	Led	lm	Ømm
14GB15K3	15W 25°-36°	1530	50
14GB21K3	21W 25°-36°	2067	50



For ceiling installation version add «P» at the end of the code.



For ceiling installation version on plasterboard add «R» at the end of the code.

ACCESSORIES



External ring for Teres Pro-Pc.

- 14RFA - Chromed
- 14RFG - Gold
- 14RFW - White
- 14RFBK - Black



Barndoors 4 fold.

14AA50BR




Honey comb.

14AA50ND

TECHNICAL NOTES

For a better application of **TERES PRO ART**, table below, we indicate the suggested diameter or area of the gobos considering the different lens and distance from spot light and masterpiece to be illuminated.

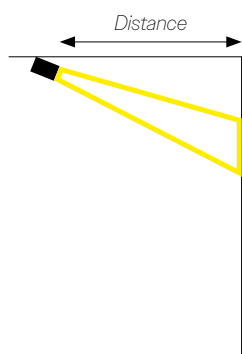

Shape	Distance				
	1m	2m	3m	4m	
○	25°	Ø 37cm	Ø 80cm	Ø 124cm	Ø 168cm
	36°	Ø 60cm	Ø 120cm	Ø 185cm	Ø 253cm
□	25°	□ 26x26cm	□ 57x57cm	□ 88x88cm	□ 119x119cm
	36°	□ 42x42cm	□ 86x86cm	□ 131x131cm	□ 179x179cm

TERES is the **sophisticated and professional track spot** that, thanks to the **built-in driver**, compact design and advanced technology, has managed to hit the spot in the retail world, adapting completely to any environment without being invasive. Its **technical vocation** is also suitable for areas that need more decisive lighting thanks to the **High Flux version, with efficiencies up to 110lm/W**. The **Wall Washer** version with asymmetrical beam and the new **HF FOOD version**, dedicated to the best color rendering of food, complete a range that has now become the **reference point in the world of spotlights**.

☑ Features

- Direct emission
- UGR<19
- IP 40

💡 Led

- 3000K/4000K
- >110 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

☑ Specifications

- Built-in driver
- CoB LED technology
- Internal aluminum reflectors, beam angles: 10°-15°-20°-36°-40°-50°-70°
- ZOOM: internal aluminum reflector with adjustable emission from 25° to 60°
- Polycarbonate lens
- Asymmetrical beam for Wall Washer

☐ Body

- Die-cast aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

☆ Certifications

- CE Conformity
- BIS Conformity
- RETILAP Conformity
- ETL Conformity
- Energy efficiency C
- 5 years warranty
- ETL Certification

⇄ Related products

- Teres Exte (p. 231)
- Teres Micro Zoom (p. 178)
- Teres IP66 (p. 356)

📦 On request

- DALI - code D*
- Bluetooth - code BT*
- 2700K - code: K27*
- 5000K - code: K5*

* Where available



