

LIQUID PL



Vetroin offices - Brescia - Italy



Scan the QR-code for the latest information


- BK-RAL9005 / Black RAL9005 / Glossy
- BK-RAL9005 / Black RAL9005 / Textured
- WH-RAL9016 / White RAL9016 / Glossy
- WH-RAL9016 / White RAL9016 / Textured

Suspended, round LED luminaire for indoor, comprising:

- Die-cast aluminium luminaire body and canopy, powder-coated or with exclusive water lacquering painting process
- Steel suspension tube, polyester powder coat or with exclusive water lacquering
- LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- Direct light distribution
- Colour tolerance according to MacAdam ≤ 3 SDCM

The luminaire is available with different light engines:

- Optical diffuser with integrated high transmittance light guide in black glass (BLACK)
- Optical diffuser with integrated high transmittance light guide in shiny opal white glass (WHITE)
- Special colour versions available. Consult factory
- Design by WALTER DE SILVA

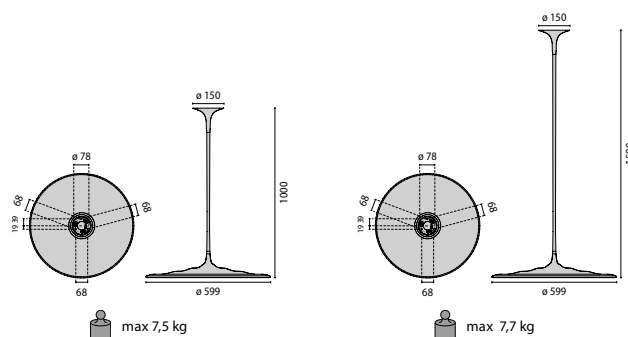

LIQUID PL
M2

LIQUID PL
M3

LIQUID PL M2 BLACK

IP20 - IK02 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
55	I	-	✓	80	3000	6200	1140	■	8712211553341	✓
55	I	-	✓	80	3000	6200	1140	■	8712211553381	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz										
55	I	-	✓	80	3000	6200	1140	■	8712211556341	✓
55	I	-	✓	80	3000	6200	1140	■	8712211556381	✓



LIQUID PL M3 BLACK

IP20 - IK02 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
55	I	-	✓	80	3000	6200	1140	■	8712211553342	✓
55	I	-	✓	80	3000	6200	1140	■	8712211553382	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz										
55	I	-	✓	80	3000	6200	1140	■	8712211556342	✓
55	I	-	✓	80	3000	6200	1140	■	8712211556382	✓



LIQUID PL M2 WHITE

IP20 - IK02 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
55	I	-	-	80	3000	6200	4130	□	8712211553301	✓
55	I	-	-	80	3000	6200	4130	□	8712211553311	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz										
55	I	-	-	80	3000	6200	4130	□	8712211556301	✓
55	I	-	-	80	3000	6200	4130	□	8712211556311	✓



LIQUID PL M3 WHITE

IP20 - IK02 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
55	I	-	-	80	3000	6200	4130	□	8712211553302	✓
55	I	-	-	80	3000	6200	4130	□	8712211553312	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz										
55	I	-	-	80	3000	6200	4130	□	8712211556302	✓
55	I	-	-	80	3000	6200	4130	□	8712211556312	✓





Private house - Verona - Italy



Vetroin offices - Brescia - Italy