


M12-A-5

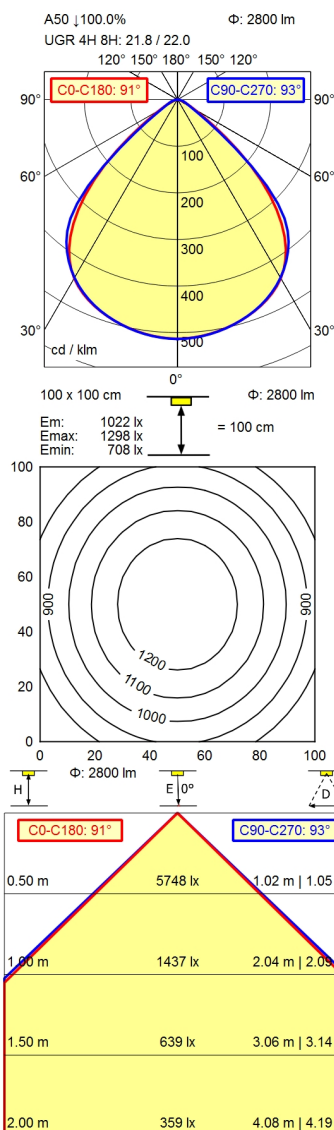

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection

Class of protection

Technology

Operation

Emergency lighting

Housing

Light source cover

Mains lead

Design

Fastening

Minimum ambient temperature

Maximum ambient temperature

EAN

Weight (net)

Dimensions

Dimensions (dimensional drawing)

Special features

LED

Without

24 V; DC

ca. 22 W

approx. 2.800 lm

approx. 127 lm/W

Cold white

approx. 5.000 K

CRI ≥ 80; R9 ≥ 10

Direct; Symmetric

91°

< 3 SDCM

Optics

≤ 5.200 cd/m²

≤ 22

IP 67

III

Multi-stage switchable

External

none

Aluminium; Anodised; Aluminium coloured
anodised
Borosilicate

Built-in plug; M12-A-5

mounted version

Screws

0 °C

50 °C

4013330143312

ca. 2,1 kg

752,5 mm; 70 mm; 19 mm

A = 752,5mm, C = 732,5mm

ADVANCED package

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

