
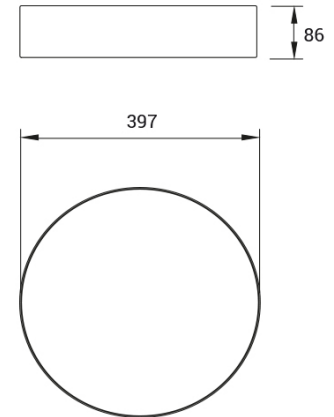






BEN Medium IP40 PG

Frosted Acryl-Satiné impact resistant.

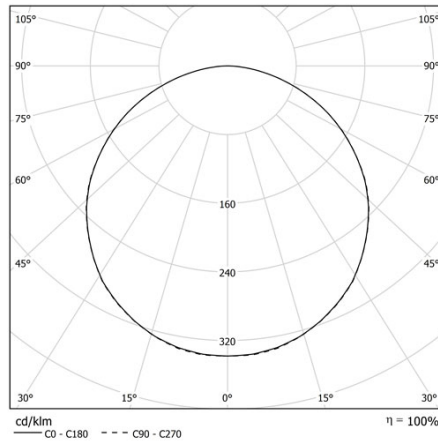

| CODE |  | FLUX | SIZE | CERTIFICATIONS |
|------------|---|--------|---------|---|
| 10PG16K4EM | 16W 4000K | 2193lm | Ø 397mm |    |

Optics

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22.

Specifications

Integrated driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Spun aluminum with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

EM: Built-in wiring 230-240V/50-60Hz with power factor >0.97 with 1h emergency block.