

BLIZ ROUND 30/40

design by R. FIORATO - F. PAGLIARINI




Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:

- Die-cast painted aluminium housing and trim
- Pressed glass diffuser, painted inside
- Silicone gasket
- Through-wiring possible
- Analogue dimmable HF ballast, 1-10 V

- Dimmable DALI
- Supplied with SMD self-heat dissipating power LED metal core board: FUTURE-PROOF™
- Stainless steel locking screws
- EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

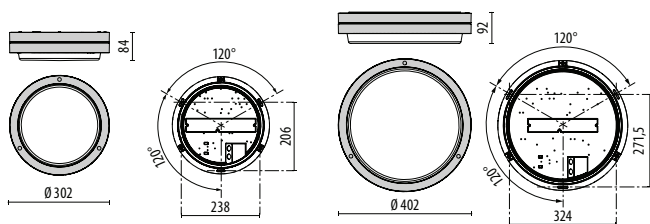

BLIZ ROUND
30

BLIZ ROUND
40




Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

BLIZ ROUND 30

IK08 5J xx5

WATTAGE	CLASS	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	304215
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	304212
30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	304216
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	304213
30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	304217
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	304214
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	304245
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	304242
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	304246
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	304243
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	○	304247
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	○	304244




Power LED - dimmable DALI 220-240 V 50/60 Hz

30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	304227
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	304224
30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	●	304228
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	●	304225
30W	I	-	80	4000	✓	S/EW	-	4539 lm	2343 lm	80	10	60000 h	○	304229
30W	I	-	80	3000	✓	S/EW	-	4236 lm	2178 lm	80	10	60000 h	○	304226

BLIZ ROUND 30 EM/3P

IK08 5J xx5


WATTAGE	CLASS	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED- Emergency 220-240 V 50/60 Hz														
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	304239
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	304236
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	●	304240
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	●	304237
21,5 W	I	-	80	4000	✓	S/EW	-	3229 lm	1673 lm	80	10	60000 h	○	304241
21,5 W	I	-	80	3000	✓	S/EW	-	3014 lm	1555 lm	80	10	60000 h	○	304238



BLIZ ROUND 40

IK06 1J xx3


WATTAGE	CLASS	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304257
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304254
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304258
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304255
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	304259
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	304256
Power LED - dimmable DALI 220-240 V 50/60 Hz														
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304269
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304266
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304270
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304267
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	304271
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	304268



BLIZ ROUND 40 EM/3P

IK06 1J xx3

WATTAGE	CLASS	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED- Emergency 220-240 V 50/60 Hz														
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304281
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304278
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	●	304282
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	●	304279
39W	I	-	80	4000	✓	S/EW	-	5998 lm	2912 lm	80	10	60000 h	○	304283
39W	I	-	80	3000	✓	S/EW	-	5798 lm	2739 lm	80	10	60000 h	○	304280



GENERAL OUTDOOR