

BLIZ SQUARE 40

design by R. FIORATO - F. PAGLIARINI



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:


- Die-cast aluminium housing and trim, powder-polyester coated ISO 9227
- Pressed glass diffuser, white painted inside
- Anti-ageing silicone gasket
- Through-wiring designed
- Board with mid-power LED 4000 K and 3000 K
- Built-in driver
- Stainless steel locking screws
- Available with ON-OFF driver and dimmable DALI
- EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08



pg 212
BLIZ



pg 212
BLIZ POST

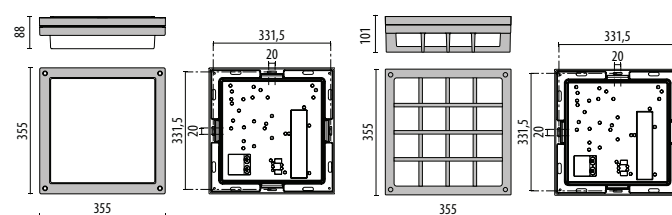

BLIZ SQUARE 40

BLIZ SQUARE 40
/G

BLIZ SQUARE 40

IK07 2J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
39 W	I	✓	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304650
39 W	I	✓	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304647
39 W	I	✓	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304651
39 W	I	✓	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304648
39 W	I	✓	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	304652
39 W	I	✓	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	304649

Power LED - dimmable DALI 220-240 V 50/60 Hz

39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304662
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304659
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304663
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304660
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	304664
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	304661

BLIZ SQUARE 40 EM/3P

IK07 2J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED - Emergency 3h - 220-240 V 50/60 Hz														
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304668
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304665
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304669
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304666
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	304670
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	304667

BLIZ SQUARE 40/G

IK07 2J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304782
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304779
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304783
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304780
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	304784
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	304781

Power LED - dimmable DALI 220-240 V 50/60 Hz



39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304788
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304785
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	●	304789
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	●	304786
39 W	I	-	80	4000	✓	S/EW	-	6732 lm	2495 lm	80	10	36000 h	○	304790
39 W	I	-	80	3000	✓	S/EW	-	6732 lm	2515 lm	80	10	36000 h	○	304787

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
BLIZ SQUARE 40		
Polycarbonate diffusor		310255



310255



GENERAL OUTDOOR