


PASSO D44 / D44 PASSO F145 / PASSO F145-LW LED / D44K/F1-LWN-AL

Product Info


Item code	PASSO D44 / D44K/F1-LWN-AL
Category	Walk-over
Environments	urban landscape, façades and architectural works, wellness, hallway, conference hall, places of worship, residential lighting
Mounting type	with rough-in housing
Mounting note	On normally inflammable surfaces allowed.
Body	Corrosion resistant die-cast aluminium body and dome.
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Seals	Silicone Rubber.
Static load	2000Kg
Standard Colour	AL aluminium grey
Option colors	GR graphite satin finish


Dimensions


D: Total diameter device (mm) 145




Included Accessories

Rough-in housing Ground and Wall rough-in housing box, high impact resistant composite technopolymer (Code PT0719).

Optical System

Diffuser	Unbreakable UV-resistant polycarbonate.
Beam	diffuse
Emission	4 emissions
Adjustable	No


Photometrics

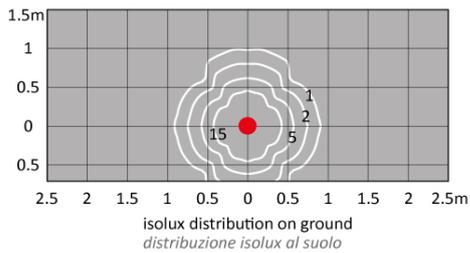

Sources

MacAdam	Step 3
Output Flux	52 lm
Source type	LED
System power	6W
Temperature Colour	4000K CRI>80

Electrical

Ballast type	ON-OFF.
Frequency	50-60Hz
Lifetime	60.000h L90B10 (Ta=25°C)
Line input	Pre-wired and tested with resin sealed watertight H07RN-F - H05RN-F (tellux/F1 model) cable (for a fast and secure connection to the main power line, use ACS/CR1 connector or similar).
Mounting ballast type	Integral
Voltage	220-240V
Separate ignition	No
Emergency 1E	No
Emergency 3E	No

Optional Accessories

Electrical

**ACS/CR1**

Fast IP68 connector 1bar (10m-1h) for cable Ø7-12mm - 3x1.5mm.

**ACS/CR6**

4 ways IP68 wiring box for cable Ø5-14mm - 3x1,5mm.