
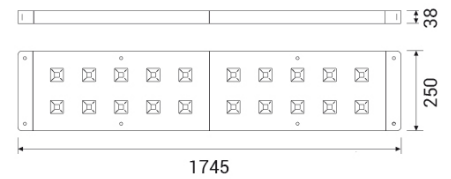
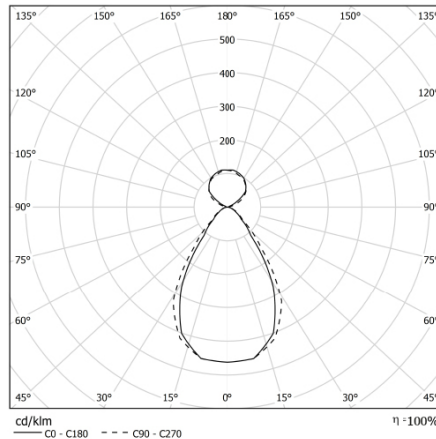


DIMPLES Long Double emission

Satin ABS reflectors with primary PC frosted diffuser. Double emission



CODE		FLUX	SIZE	CERTIFICATIONS
48DI70L4LRDD	70W 1120mA 4000K	7200lm	250x1745mm	  

Optics

Satin ABS reflectors with primary PC frosted diffuser, UGR<19, and upper diffuser for dual emission direct / indirect.

Specifications

Integrated driver;
CRI>80;
McAdams 3;
Life Time: L80/B50 >50.000h;
5 years complete warranty;
Eye safety: risk-free (RG 0) in accordance with EN62471:2009

Body

Frosted ABS body-diffuser with anodized aluminum base.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RDD: Built-in wiring 230-240V/50-60Hz, DALI dimmable.