





DIMPLES PG

PG version with additional frosted PC coplanar screen, UGR<22

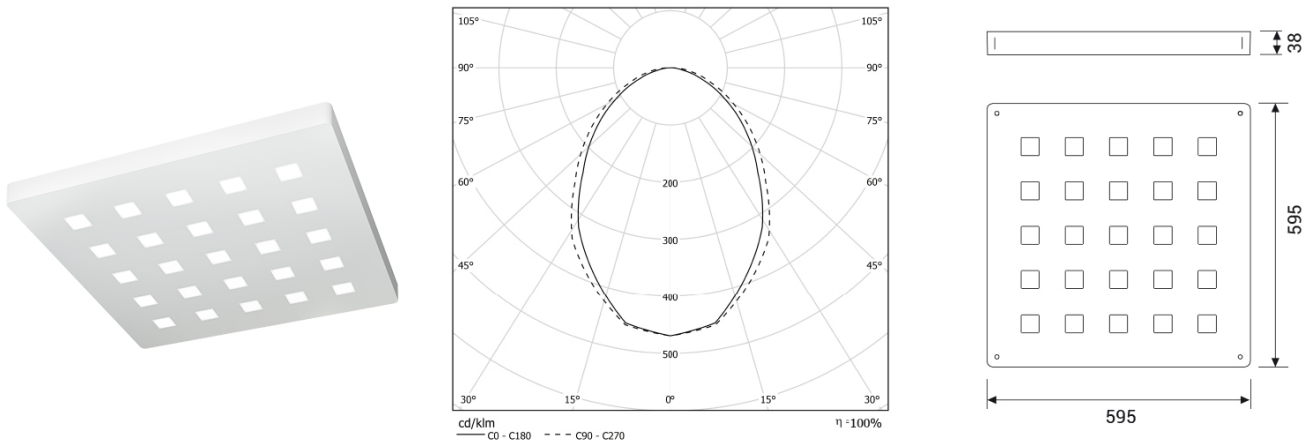

CODE		FLUX	SIZE	CERTIFICATIONS
48PG44L4RDD	44W 700mA 4000K	4220lm	595x595mm	  

Optics

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22

Specifications

Integrated driver;
CRI>80;
McAdams 3;
Life Time: L80/B50 >50.000h;
5 years complete warranty;
Eye safety: risk-free (RG 0) in accordance with EN62471:2009

Body

Frosted ABS body-diffuser with anodized aluminum base.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RDD: Built-in wiring 230-240V/50-60Hz, DALI dimmable.