

# DLSB LED



WH-RAL9016 / White RAL9016 / Textured


Scan the QR-code for the latest information

Recessed, modular, round LED downlight for indoor, comprising:

- Multi-purpose die-cast aluminium housing combines all functions: heat-sinking, ceiling trim, ceiling brackets and gear tray connection
- Light-tight housing (prevents light distribution in the suspended ceiling)
- Suitable for ceiling tile thickness from 1-25 mm
- Recessed frosted diffuser for optimal light distribution and high homogeneity
- White modular reflector, ABS injection-moulded with light-tight connection of LED board
- Excellent heat dissipation through die-cast aluminium heat sink with Fast™ (Flexible Air Stream) Technology
- Colour tolerance according to MacAdam  $\leq 3$  SDCM
- Built-in driver
- Protection class IP54 (for light emission surface for installation in closed ceilings)
- Emergency 1/3h and DALI + emergency 1/3h upon request



Adigeo Shopping Centre - Verona - Italy

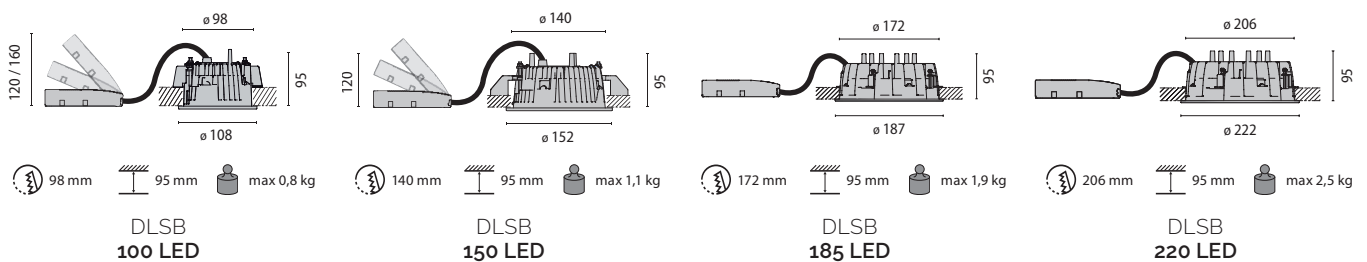

## DLSB100 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	
<b>Power LED 220-240 V 50/60 Hz</b>										
14	I	-	-	80	4000	1500	1090	<input type="checkbox"/>	<b>810711334001</b>	-
14	I	-	-	80	3000	1400	1060	<input type="checkbox"/>	<b>810711333001</b>	-
10	I	-	-	80	4000	1100	810	<input type="checkbox"/>	<b>810710934001</b>	-
10	I	-	-	80	3000	1040	790	<input type="checkbox"/>	<b>810710933001</b>	-
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
14	I	-	-	80	4000	1500	1090	<input type="checkbox"/>	<b>810711364001</b>	-
14	I	-	-	80	3000	1400	1060	<input type="checkbox"/>	<b>810711363001</b>	-
10	I	-	-	80	4000	1100	810	<input type="checkbox"/>	<b>810710964001</b>	-
10	I	-	-	80	3000	1040	790	<input type="checkbox"/>	<b>810710963001</b>	-



## DLSB150 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	
<b>Power LED 220-240 V 50/60 Hz</b>										
24	I	-	-	80	4000	3010	1990	<input type="checkbox"/>	<b>815712334001</b>	-
24	I	-	-	80	3000	2640	1790	<input type="checkbox"/>	<b>815712333001</b>	-
19	I	-	-	80	4000	2510	1700	<input type="checkbox"/>	<b>815711834001</b>	-
19	I	-	-	80	3000	2250	1500	<input type="checkbox"/>	<b>815711833001</b>	-
13	I	-	-	80	4000	1960	1320	<input type="checkbox"/>	<b>815711234001</b>	-
13	I	-	-	80	3000	1760	1180	<input type="checkbox"/>	<b>815711233001</b>	-
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
24	I	-	-	80	4000	3010	1990	<input type="checkbox"/>	<b>815712364001</b>	-
24	I	-	-	80	3000	2640	1790	<input type="checkbox"/>	<b>815712363001</b>	-
19	I	-	-	80	4000	2510	1700	<input type="checkbox"/>	<b>815711864001</b>	-
19	I	-	-	80	3000	2250	1500	<input type="checkbox"/>	<b>815711863001</b>	-
13	I	-	-	80	4000	1960	1320	<input type="checkbox"/>	<b>815711264001</b>	-
13	I	-	-	80	3000	1760	1180	<input type="checkbox"/>	<b>815711263001</b>	-



## DLSB185 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	
<b>Power LED 220-240 V 50/60 Hz</b>										
35	I	-	-	80	4000	4110	2990	<input type="checkbox"/>	<b>818713334001</b>	-
35	I	-	-	80	3000	3540	2610	<input type="checkbox"/>	<b>818713333001</b>	-
26	I	-	-	80	4000	3410	2440	<input type="checkbox"/>	<b>818712434001</b>	-
26	I	-	-	80	3000	2860	2210	<input type="checkbox"/>	<b>818712433001</b>	-
18	I	-	-	80	4000	2460	1900	<input type="checkbox"/>	<b>818711634001</b>	-
18	I	-	-	80	3000	2380	1740	<input type="checkbox"/>	<b>818711633001</b>	-
12	I	-	-	80	4000	1890	1350	<input type="checkbox"/>	<b>818711234001</b>	-
12	I	-	-	80	3000	1710	1240	<input type="checkbox"/>	<b>818711233001</b>	-
9	I	-	-	80	4000	1330	1000	<input type="checkbox"/>	<b>818710834001</b>	-
9	I	-	-	80	3000	1270	930	<input type="checkbox"/>	<b>818710833001</b>	-
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
35	I	-	-	80	4000	4110	2990	<input type="checkbox"/>	<b>818713364001</b>	-
35	I	-	-	80	3000	3540	2610	<input type="checkbox"/>	<b>818713363001</b>	-
26	I	-	-	80	4000	3410	2440	<input type="checkbox"/>	<b>818712464001</b>	-
26	I	-	-	80	3000	2860	2210	<input type="checkbox"/>	<b>818712463001</b>	-
18	I	-	-	80	4000	2460	1900	<input type="checkbox"/>	<b>818711664001</b>	-
18	I	-	-	80	3000	2380	1740	<input type="checkbox"/>	<b>818711663001</b>	-
12	I	-	-	80	4000	1890	1350	<input type="checkbox"/>	<b>818711264001</b>	-
12	I	-	-	80	3000	1710	1240	<input type="checkbox"/>	<b>818711263001</b>	-
9	I	-	-	80	4000	1330	1000	<input type="checkbox"/>	<b>818710864001</b>	-
9	I	-	-	80	3000	1270	930	<input type="checkbox"/>	<b>818710863001</b>	-



# DLSB220 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C



LUMINAIRE WATTAGE [W]	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
-----------------------	-------	------	----------------	-----	--------	-------------------------------	-----------------------------	-----------------	-------------

## Power LED 220-240 V 50/60 Hz

51	I	-	-	80	4000	5880	4560	<input type="checkbox"/>	<b>822722334001</b>	-
51	I	-	-	80	3000	5030	4070	<input type="checkbox"/>	<b>822722333001</b>	-
38	I	-	-	80	4000	4880	3690	<input type="checkbox"/>	<b>822721734001</b>	-
38	I	-	-	80	3000	4240	3380	<input type="checkbox"/>	<b>822721733001</b>	-
26	I	-	-	80	4000	3850	2940	<input type="checkbox"/>	<b>822721234001</b>	-
26	I	-	-	80	3000	3430	2690	<input type="checkbox"/>	<b>822721233001</b>	-
18	I	-	-	80	4000	2750	2090	<input type="checkbox"/>	<b>822720834001</b>	-
18	I	-	-	80	3000	2460	1920	<input type="checkbox"/>	<b>822720833001</b>	-
12	I	-	-	80	4000	2030	1550	<input type="checkbox"/>	<b>822720534001</b>	-
12	I	-	-	80	3000	1860	1430	<input type="checkbox"/>	<b>822720533001</b>	-

## Power LED - dimmable DALI 220-240 V 50/60 Hz

51	I	-	-	80	4000	5880	4560	<input type="checkbox"/>	<b>822722364001</b>	-
51	I	-	-	80	3000	5030	4070	<input type="checkbox"/>	<b>822722363001</b>	-
38	I	-	-	80	4000	4880	3690	<input type="checkbox"/>	<b>822721764001</b>	-
38	I	-	-	80	3000	4240	3380	<input type="checkbox"/>	<b>822721763001</b>	-
26	I	-	-	80	4000	3850	2940	<input type="checkbox"/>	<b>822721264001</b>	-
26	I	-	-	80	3000	3430	2690	<input type="checkbox"/>	<b>822721263001</b>	-
18	I	-	-	80	4000	2750	2090	<input type="checkbox"/>	<b>822720864001</b>	-
18	I	-	-	80	3000	2460	1920	<input type="checkbox"/>	<b>822720863001</b>	-
12	I	-	-	80	4000	2030	1550	<input type="checkbox"/>	<b>822720564001</b>	-
12	I	-	-	80	3000	1860	1430	<input type="checkbox"/>	<b>822720563001</b>	-



MITSUI outlet park - Taichung - Taiwan