

DL ROUND

design by PERFORMANCE IN LIGHTING



Recessed, modular, round LED downlight for indoor, comprising:

- LED module, die-cast aluminium heat sink, reflector with integrated ceiling trim, diffuser and external supply unit
- All components can be tool-less replaced laterly
- Integrated diffuser with optimum diffusion for a very high level of uniformity
- Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
- Built-in driver
- DALI dimmable
- Suitable for ceiling tile thickness from 1-25 mm
- Quick installation without tools
- Wieland connector

Options:


- High-shine modular radial louvre reflector with integrated ceiling frame made of metallised injection-moulded ABS with light-tight connection to LED module
- Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module and matte plastic pane (IP54)




Musiikkitalo Music Centre - Helsinki - Finland



Other RAL colours available on request



DL SQUARE
MIDI



DL SQUARE
MAXI

DL ROUND MIDI

IK07 2J xx5 - 650 °

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
13 W	I	-	80	4000	✓	C/EW	2 x 41°	2100 lm	1780 lm	80	10	50000 h		3108966
13 W	I	-	90	3000	✓	C/EW	2 x 41°	1900 lm	1640 lm	80	10	50000 h		3108964
9 W	I	-	80	4000	✓	C/EW	2 x 41°	1500 lm	1280 lm	80	10	50000 h		3108960
9 W	I	-	90	3000	✓	C/EW	2 x 41°	1400 lm	1180 lm	80	10	50000 h		3108958

Power LED - dimmable DALI 220-240 V 50/60 Hz

13 W	I	-	80	4000	✓	C/EW	2 x 41°	2100 lm	1780 lm	80	10	50000 h		3108969
13 W	I	-	90	3000	✓	C/EW	2 x 41°	1900 lm	1640 lm	80	10	50000 h		3108968
9 W	I	-	80	4000	✓	C/EW	2 x 41°	1500 lm	1280 lm	80	10	50000 h		3108963
9 W	I	-	90	3000	✓	C/EW	2 x 41°	1400 lm	1180 lm	80	10	50000 h		3108962

Power LED - emergency 1h - 220-240 V 50/60 Hz

13 W	I	-	80	4000	✓	C/EW	2 x 41°	2100 lm	1780 lm	80	10	50000 h		3108967
13 W	I	-	90	3000	✓	C/EW	2 x 41°	1900 lm	1640 lm	80	10	50000 h		3108965
9 W	I	-	80	4000	✓	C/EW	2 x 41°	1500 lm	1280 lm	80	10	50000 h		3108961
9 W	I	-	90	3000	✓	C/EW	2 x 41°	1400 lm	1180 lm	80	10	50000 h		3108959

DL ROUND MIDI WIELAND

IK07 2J xx5 - 650 °

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
13 W	I	-	80	4000	✓	C/EW	2 x 41°	2100 lm	1780 lm	80	10	50000 h		3110057
13 W	I	-	90	3000	✓	C/EW	2 x 41°	1900 lm	1640 lm	80	10	50000 h		3110056
9 W	I	-	80	4000	✓	C/EW	2 x 41°	1500 lm	1280 lm	80	10	50000 h		3110055
9 W	I	-	90	3000	✓	C/EW	2 x 41°	1400 lm	1180 lm	80	10	50000 h		3110054

DL ROUND MAXI

IK07 2J xx5 - 650 °

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
21 W	I	-	80	4000	✓	C/EW	2 x 45°	3500 lm	3130 lm	80	10	50000 h		3108978
21 W	I	-	90	3000	✓	C/EW	2 x 45°	3300 lm	2895 lm	80	10	50000 h		3108976
15 W	I	-	80	4000	✓	C/EW	2 x 45°	2500 lm	2260 lm	80	10	50000 h		3108972
15 W	I	-	90	3000	✓	C/EW	2 x 45°	2350 lm	2080 lm	80	10	50000 h		3108970

Power LED - dimmable DALI 220-240 V 50/60 Hz

21 W	I	-	80	4000	✓	C/EW	2 x 45°	3500 lm	3130 lm	80	10	50000 h		3108981
21 W	I	-	90	3000	✓	C/EW	2 x 45°	3300 lm	2895 lm	80	10	50000 h		3108980
15 W	I	-	80	4000	✓	C/EW	2 x 45°	2500 lm	2260 lm	80	10	50000 h		3108975
15 W	I	-	90	3000	✓	C/EW	2 x 45°	2350 lm	2080 lm	80	10	50000 h		3108974

Power LED - emergency 1h - 220-240 V 50/60 Hz

21 W	I	-	80	4000	✓	C/EW	2 x 45°	3500 lm	3130 lm	80	10	50000 h		3108979
21 W	I	-	90	3000	✓	C/EW	2 x 45°	3300 lm	2895 lm	80	10	50000 h		3108977
15 W	I	-	80	4000	✓	C/EW	2 x 45°	2500 lm	2260 lm	80	10	50000 h		3108973
15 W	I	-	90	3000	✓	C/EW	2 x 45°	2350 lm	2080 lm	80	10	50000 h		3108971


DL ROUND MAXI WIELAND

IK07 2J xx5 - 650 °

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
21 W	I	-	80	4000	✓	C/EW	2 x 45°	3500 lm	3130 lm	80	10	50000 h		3110061
21 W	I	-	90	3000	✓	C/EW	2 x 45°	3300 lm	2895 lm	80	10	50000 h		3110060
15 W	I	-	80	4000	✓	C/EW	2 x 45°	2500 lm	2260 lm	80	10	50000 h		3110059
15 W	I	-	90	3000	✓	C/EW	2 x 45°	2350 lm	2080 lm	80	10	50000 h		3110058

MANDATORY ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
DL ROUND MIDI		
LOUVRE DL ROUND MIDI		3109008
WHITE OPTIC IP54 DL ROUND MIDI		3109009
BLACK REFLECTOR DL ROUND MIDI		3109007
DL ROUND MAXI		
LOUVRE DL ROUND MAXI		3109012
WHITE OPTIC IP54 DL ROUND MAXI		3109013
BLACK REFLECTOR DL ROUND MAXI		3109011

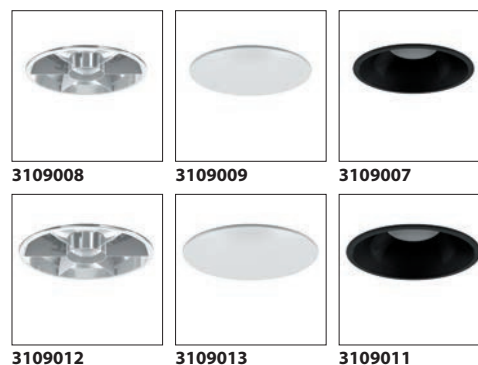

DL SQUARE

design by PERFORMANCE IN LIGHTING



- Recessed, modular, square LED downlight for indoor, comprising:
- LED module, die-cast aluminium heat sink, reflector with integrated ceiling trim, diffuser and external supply unit
 - All components can be tool-less replaced laterly
 - Integrated diffuser with optimum diffusion for a very high level of uniformity
 - Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
 - Built-in driver
 - DALI dimmable
 - Suitable for ceiling tile thickness from 1-25 mm
 - Quick installation without tools
 - Wieland connector

Options:


- High-shine modular radial louvre reflector with integrated ceiling frame made of metallised injection-moulded ABS with light-tight connection to LED module
- Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module and matte plastic pane (IP54)




Microsoft headquarters - Monaco - Germany



Other RAL colours available on request



DL SQUARE
MIDI



DL SQUARE
MAXI

