


ELIA OL

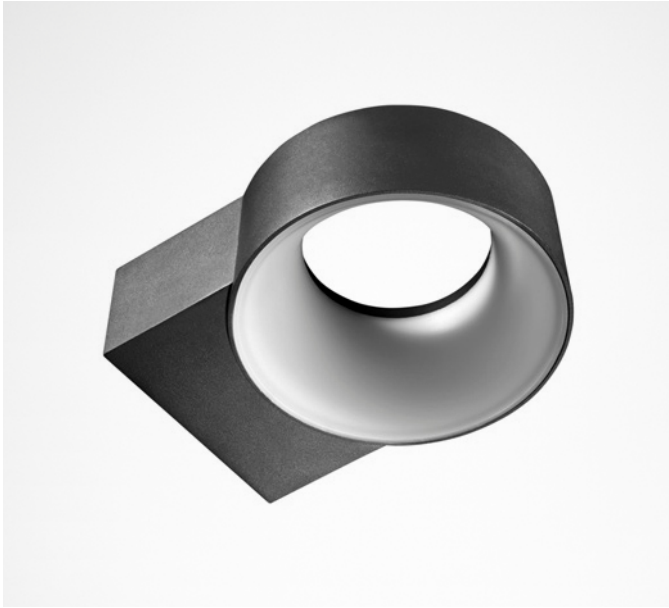


Scan the QR-code for the latest information

- BK-RAL9005 / Black RAL9005 /
- WH-RAL9016 / White RAL9016 /

Die-cast aluminum fixture for wall mounting, ideal for indoor and outdoor architectural lighting such as: stairs, passageways or facades, quick and easy to install, with a clean and essential line

- Designed in two different finishes (black and white), with double emission diffusing polycarbonate opal screen (top and down) to create a comfortable atmosphere, color temperatures of 3,000K, 4,000 K and 5,700 K and a color rendering index greater than 80
- It has been designed to withstand temperature variations from -20 °C to + 45 °C, water and dust penetration up to IP65 degree and shocks up to IK08 degree
- Light and handy, it is easy to install thanks also to the rear bracket for fixing, the quick-fit terminal placed in the back for the electrical wiring

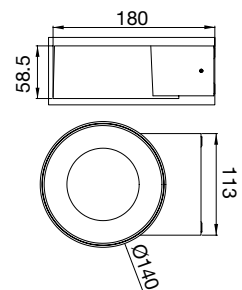

ELIA OL

ELIA OL

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 100-240 V 50/60 Hz											
8	I	✓	80	4000	OPAL	-	-	650	■	GWF2100FR840	✓
8	I	✓	80	3000	OPAL	-	-	650	■	GWF2100FR830	✓
8	I	✓	80	4000	OPAL	-	-	650	□	GWF2110FR840	✓
8	I	✓	80	3000	OPAL	-	-	650	□	GWF2110FR830	✓

