
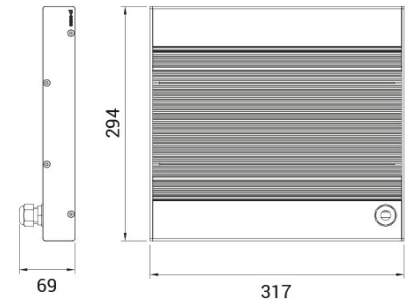


## ERGO DS

Anodized aluminum body and die-cast end caps. CRI>90. IP65 indoor.

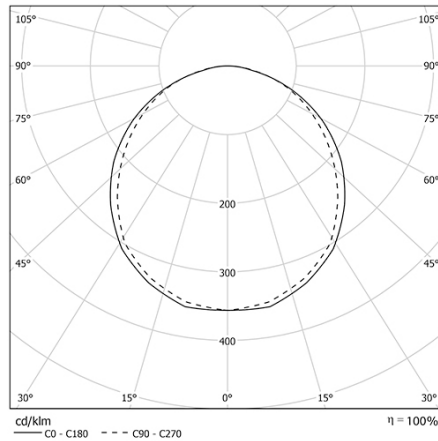

| CODE       |  | FLUX    | SIZE       | CERTIFICATIONS  |
|------------|---|---------|------------|---|
| 02DS86K465 | 86W 4000K   | 10439lm | 317x294x69 |    |

### Optics

Polycarbonate lens, wide diffused symmetrical distribution.

### Specifications

Integrated driver;  
CRI>90;  
McAdams 3;  
Life Time: L80/B10 >50.000h;  
IK10;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009;  
Temperature range: -25° / +45°

### Body

Anodized aluminum body and die-cast end caps.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.