



## EUROSTANDARD PLUS TRACK DALI

Three-phase dimmable tracks with three circuits.

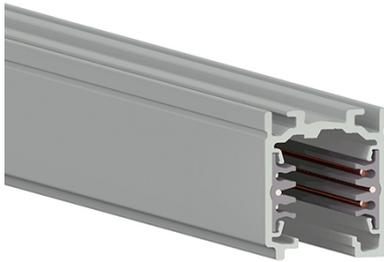

CODE		FLUX	SIZE	CERTIFICATIONS
15AA2DA			2mt	 IP 20

### Description

DALI dimmable version

### Specifications

The conductors are integrated in the track by means of rigid extruded profile made from insulating material guaranteeing high dielectric strength. The 3 separate circuits consisting of 3 phase conductors and a common neutral allow for 3 lighting configurations to be switched individually. In case of single phase supply the maximum loading must be of 16A (3500 VA) and can be divided among the 3 circuits.

The 3-phase supply allows for an overall loading of 16 A (10500 VA) which can be divided among the 3 circuits (3x3500 VA).

The earth positioned on the side leads to an asymmetrical structure of the track. As a consequence couplers must be selected carefully.

### Body

Manufactured from die-cast aluminum.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.