

ELIA AL





Scan the QR-code for the latest information

□ WH-RAL9016 / White RAL9016 /

Flush-mounting LED device for accent lighting in commercial areas and offices

- This modular flush-mounting solution features a rotosymmetrical optic equipped with a passive heat removal system, in die-cast aluminium
- It is composed of a white powder-coated die-cast aluminium frame and 2 different optics (36° and 60°) that guarantee a UGR of less than 19
- Installation is quick and easy, thanks to the reduced weight of the device, the bayonet coupling and the simple wiring, with the connector located on the device and remote power supply included
- External emergency kit with 3h autonomy available (to be ordered separately)

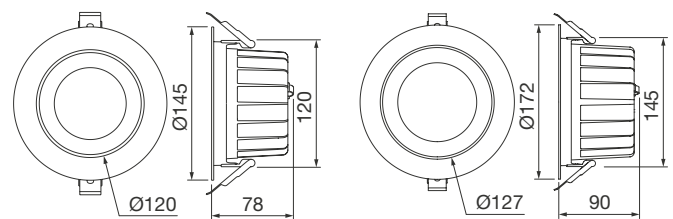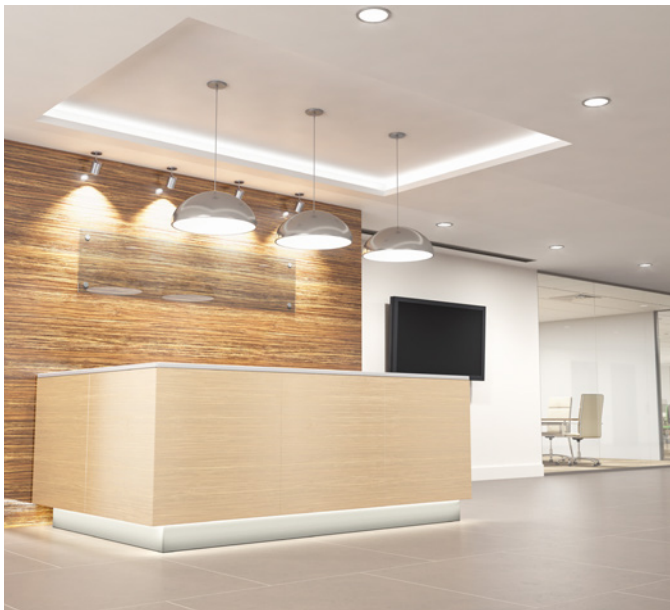

ELIA AL
S2 18W

ELIA AL
M2 25W

ELIA AL S2 18W 36°

IP40 - IK06 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
18	II	✓	-	90	4000	-	1800	☐	GWF1410GG940	✓
18	II	✓	-	90	3000	-	1700	☐	GWF1410GG930	✓
18	II	✓	-	80	4000	-	2000	☐	GWF1410GG840	✓
18	II	✓	-	80	3000	-	1900	☐	GWF1410GG830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz										
18	II	✓	-	90	4000	-	1800	☐	GWF1411GG940	✓
18	II	✓	-	90	3000	-	1700	☐	GWF1411GG930	✓
18	II	✓	-	80	4000	-	2000	☐	GWF1411GG840	✓
18	II	✓	-	80	3000	-	1900	☐	GWF1411GG830	✓



ELIA AL S2 18W 60°

IP40 - IK06 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
18	II	✓	-	90	4000	-	1900	☐	GWF1410GH940	✓
18	II	✓	-	90	3000	-	1800	☐	GWF1410GH930	✓
18	II	✓	-	80	4000	-	2100	☐	GWF1410GH840	✓
18	II	✓	-	80	3000	-	2000	☐	GWF1410GH830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz										
18	II	✓	-	90	4000	-	1900	☐	GWF1411GH940	✓
18	II	✓	-	90	3000	-	1800	☐	GWF1411GH930	✓
18	II	✓	-	80	4000	-	2100	☐	GWF1411GH840	✓
18	II	✓	-	80	3000	-	2000	☐	GWF1411GH830	✓



ELIA AL M2 25W 36°

IP40 - IK06 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
25	II	✓	-	90	4000	-	2500	☐	GWF1410MG940	✓
25	II	✓	-	90	3000	-	2300	☐	GWF1410MG930	✓
25	II	✓	-	80	4000	-	2700	☐	GWF1410MG840	✓
25	II	✓	-	80	3000	-	2500	☐	GWF1410MG830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz										
25	II	✓	-	90	4000	-	2500	☐	GWF1411MG940	✓
25	II	✓	-	90	3000	-	2300	☐	GWF1411MG930	✓
25	II	✓	-	80	4000	-	2700	☐	GWF1411MG840	✓
25	II	✓	-	80	3000	-	2500	☐	GWF1411MG830	✓



ELIA AL M2 25W 60°

IP40 - IK06 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	DIN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz										
25	II	✓	-	90	4000	-	2600	☐	GWF1410MH940	✓
25	II	✓	-	90	3000	-	2400	☐	GWF1410MH930	✓
25	II	✓	-	80	4000	-	2800	☐	GWF1410MH840	✓
25	II	✓	-	80	3000	-	2600	☐	GWF1410MH830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz										
25	II	✓	-	90	4000	-	2600	☐	GWF1411MH940	✓
25	II	✓	-	90	3000	-	2400	☐	GWF1411MH930	✓
25	II	✓	-	80	4000	-	2800	☐	GWF1411MH840	✓
25	II	✓	-	80	3000	-	2600	☐	GWF1411MH830	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
ELIA AL			
Emergency kit 3h		GWS2992	✓



GWS2992