


ELIA EL





- BK-RAL9005 / Black RAL9005 /
- WH-RAL9016 / White RAL9016 /

Scan the QR-code for the latest information

Die-cast aluminum LED luminaire for ceiling or wall mounting, ideal for the lighting of exteriors and interiors such as: stairs, passageways, service rooms, simple and quick to install, with a clean line and essential

- Designed in two different finishes (black and white), with opal diffuser in polycarbonate, color temperatures 3.000K, 4.000 K and 5.700 K and color rendering index higher than 80
- It has been designed to withstand temperature variations from -20 ° C to + 50 ° C, water and dust penetration up to IP65 degree and shocks up to IK08 degree
- Lightweight and handy ELIA EL is easy to install thanks to the quick connection terminal for the electrical wiring placed in the rear part and to the second cable outlet for pass-through wiring

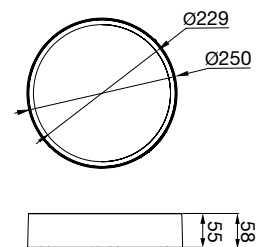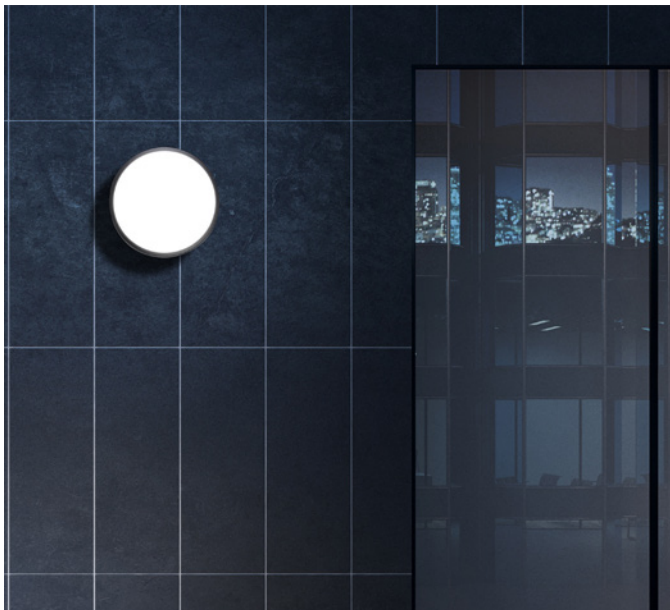

ELIA EL

ELIA EL

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
18	I	✓	80	5700	OPAL	-	-	1700	■	GWF2200LA857	✓
18	I	✓	80	4000	OPAL	-	-	1650	■	GWF2200LA840	✓
18	I	✓	80	3000	OPAL	-	-	1500	■	GWF2200LA830	✓
18	I	✓	80	5700	OPAL	-	-	1700	□	GWF2210LA857	✓
18	I	✓	80	4000	OPAL	-	-	1650	□	GWF2210LA840	✓
18	I	✓	80	3000	OPAL	-	-	1500	□	GWF2210LA830	✓

