

# ELIA FL L3



IP 66

750°C

≥ +50°C

CLASS I


DALI



■ Black RAL 9017 / Black RAL9017 /


Scan the QR-code for the latest information

- LED floodlight, available in medium and high-power versions for outdoor and indoor applications in industrial, tertiary and sports contexts, such as façades, warehouses, car parks and sports fields
- Thanks to its black powder-coated die-cast aluminium body and its front glass, the fixture is tough, durable (IP66 and IK08) and is able to withstand harsh environmental conditions (such as ambient temperature variations from -30°C to +50°C)
  - Available in 4 different sizes and power steps (50 W, 100 W, 150 W and 200 W), the range allows for great flexibility with its multiple possible combinations: 3 colour temperature options (3,000 K warm white, 4,000 K neutral white and 5,700 K cool white) with a colour rendering index of more than 80; 2 integrated power supply options (On/Off and DALI); and 2 optics options (60° and asymmetrical)
  - The luminaire can be ceiling, wall or floor-mounted through the integrated adjustable steel bracket with a protractor, or pole-mounted (in poles with diameter up to 61 mm) through a dedicated accessory (to be ordered separately)



ELIA FL L3 150W

## Identifying and classifying our optics

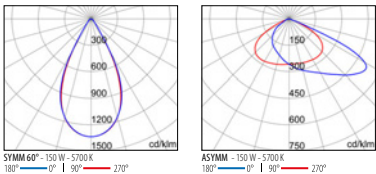

## ELIA FL L3 150W 60°

IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>											
150	I	-	80	5700	SYMM	60°	-	21200	■	<b>GWF1100RH857</b>	✓
150	I	-	80	4000	SYMM	60°	-	21200	■	<b>GWF1100RH840</b>	✓
150	I	-	80	3000	SYMM	60°	-	20400	■	<b>GWF1100RH830</b>	✓
<b>Power LED dimmable DALI - 220-240 V 50/60 Hz</b>											
150	I	-	80	4000	SYMM	60°	-	21200	■	<b>GWF1101RH840</b>	✓



## ELIA FL L3 150W ASYMMETRIC

IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>											
150	I	-	80	5700	ASYMM	-	-	20600	■	<b>GWF1100RC857</b>	✓
150	I	-	80	4000	ASYMM	-	-	20600	■	<b>GWF1100RC840</b>	✓
150	I	-	80	3000	ASYMM	-	-	19900	■	<b>GWF1100RC830</b>	✓
<b>Power LED dimmable DALI - 220-240 V 50/60 Hz</b>											
150	I	-	80	4000	ASYMM	-	-	20600	■	<b>GWF1101RC840</b>	✓



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
<b>ELIA FL L3</b>			
Headpole - black		<b>GWF1901</b>	✓



**GWF1901**