

ELIA FL XL3



IP 66

750° C

≥ +50° C

CLASS I


DALI



■ Black RAL 9017 / Black RAL9017 /


Scan the QR-code for the latest information

- LED floodlight, available in medium and high-power versions for outdoor and indoor applications in industrial, tertiary and sports contexts, such as façades, warehouses, car parks and sports fields
- Thanks to its black powder-coated die-cast aluminium body and its front glass, the fixture is tough, durable (IP66 and IK08) and is able to withstand harsh environmental conditions (such as ambient temperature variations from -30°C to +50°C)
 - Available in 4 different sizes and power steps (50 W, 100 W, 150 W and 200 W), the range allows for great flexibility with its multiple possible combinations: 3 colour temperature options (3,000 K warm white, 4,000 K neutral white and 5,700 K cool white) with a colour rendering index of more than 80; 2 integrated power supply options (On/Off and DALI); and 2 optics options (60° and asymmetrical)
 - The luminaire can be ceiling, wall or floor-mounted through the integrated adjustable steel bracket with a protractor, or pole-mounted (in poles with diameter up to 61 mm) through a dedicated accessory (to be ordered separately)

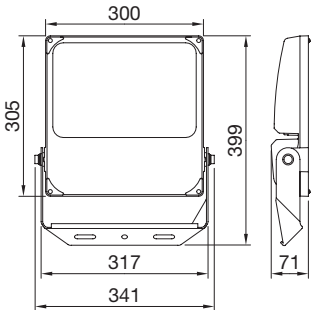

ELIA FL XL3 200W

Identifying and classifying our optics

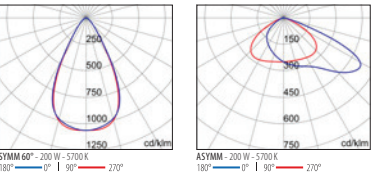

ELIA FL XL3 200W 60°

IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
200	I	✓	80	5700	SYMM	60°	-	27900	■	GWF1100ZH857	✓
200	I	✓	80	4000	SYMM	60°	-	27900	■	GWF1100ZH840	✓
200	I	✓	80	3000	SYMM	60°	-	26900	■	GWF1100ZH830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz											
200	I	✓	80	4000	SYMM	60°	-	27900	■	GWF1101ZH840	✓



ELIA FL XL3 200W ASYMMETRIC

IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
200	I	✓	80	5700	ASYMM	-	-	27600	■	GWF1100ZC857	✓
200	I	✓	80	4000	ASYMM	-	-	27600	■	GWF1100ZC840	✓
200	I	✓	80	3000	ASYMM	-	-	26600	■	GWF1100ZC830	✓
Power LED dimmable DALI - 220-240 V 50/60 Hz											
200	I	✓	80	4000	ASYMM	-	-	27600	■	GWF1101ZC840	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
ELIA FL XL3			
Headpole - black		GWF1901	✓



GWF1901