


ELIA FL MINI XS1




■ Black RAL 9017 / Black RAL9017 /

Scan the QR-code for the latest information

Low-power LED floodlight for indoor and outdoor architectural lighting for both residential and professional applications, such as façades, gardens, green areas and walkways


- Thanks to its black powder-coated die-cast aluminium body and its front glass, it is tough, durable and able to withstand harsh environmental conditions
- Available in 2 sizes and 3 power steps (10 W, 20 W and 30 W), the range allows for great flexibility with its multiple possible combinations: 2 colour temperature options (3,000 K warm white and 4,000 K neutral white) with a colour rendering index of more than 80, and 2 optics options (100° or asymmetrical)
- The fixture is equipped with an integrated On/Off electronic power supply, and it is also available with an integrated motion and luminosity sensor
- The luminaire can be ceiling, wall or floor-mounted through the integrated adjustable steel bracket

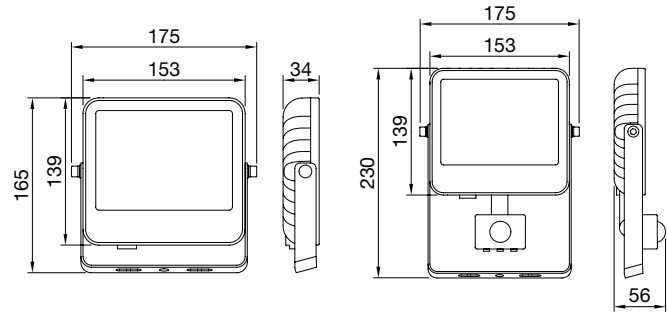

ELIA FL MINI XS1 10W*

ELIA FL MINI XS1 10W
PIR

Identifying and classifying our optics



ELIA FL MINI XS1 10W 100°

IP66 - IK08 - 750 °C

| LUMINAIRE WATTAGE (W) | CLASS | ENEC | CRI | KELVIN | OPTIC | BEAM ANGLE | LIGHTSOURCE LUMEN OUTPUT (lm) | LUMINAIRE LUMEN OUTPUT (lm) | COLOUR / FINISH | PART NUMBER | UKCA |
|------------------------------|-------|------|-----|--------|-------|------------|----------------------------------|--------------------------------|--------------------|---------------------|------|
| Power LED 220-240 V 50/60 Hz | | | | | | | | | | | |
| 10 | I | ✓ | 80 | 4000 | SYMM | 100° | - | 1500 | ■ | GWF1100AL840 | ✓ |
| 10 | I | ✓ | 80 | 3000 | SYMM | 100° | - | 1400 | ■ | GWF1100AL830 | ✓ |



ELIA FL MINI XS1 10W 100° PIR

IP65 - IK08 - 750 °C

| LUMINAIRE WATTAGE (W) | CLASS | ENEC | CRI | KELVIN | OPTIC | BEAM ANGLE | LIGHTSOURCE LUMEN OUTPUT (lm) | LUMINAIRE LUMEN OUTPUT (lm) | COLOUR / FINISH | PART NUMBER | UKCA |
|---|-------|------|-----|--------|-------|------------|----------------------------------|--------------------------------|--------------------|---------------------|------|
| Power LED 220-240 V 50/60 Hz + PIR sensor | | | | | | | | | | | |
| 10 | I | ✓ | 80 | 4000 | SYMM | 100° | - | 1500 | ■ | GWF1105AL840 | ✓ |
| 10 | I | ✓ | 80 | 3000 | SYMM | 100° | - | 1400 | ■ | GWF1105AL830 | ✓ |

