


ELIA FL MINI XS2

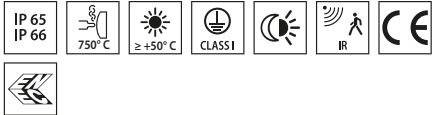


■ Black RAL 9017 / Black RAL9017 /

Scan the QR-code for the latest information

Low-power LED floodlight for indoor and outdoor architectural lighting for both residential and professional applications, such as façades, gardens, green areas and walkways


- Thanks to its black powder-coated die-cast aluminium body and its front glass, it is tough, durable and able to withstand harsh environmental conditions
- Available in 2 sizes and 3 power steps (10 W, 20 W and 30 W), the range allows for great flexibility with its multiple possible combinations: 2 colour temperature options (3,000 K warm white and 4,000 K neutral white) with a colour rendering index of more than 80, and 2 optics options (100° or asymmetrical)
- The fixture is equipped with an integrated On/Off electronic power supply, and it is also available with an integrated motion and luminosity sensor
- The luminaire can be ceiling, wall or floor-mounted through the integrated adjustable steel bracket

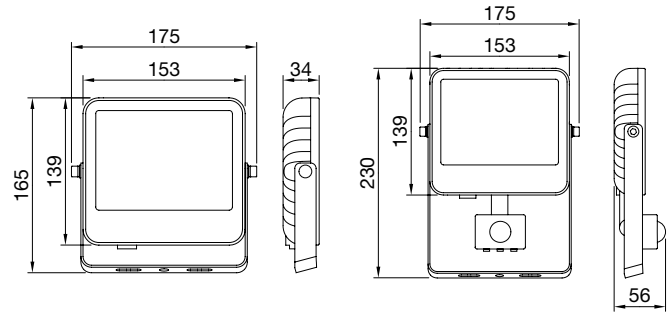

ELIA FL MINI XS2 20W

ELIA FL MINI XS2 20W/
PIR

Identifying and classifying our optics



ELIA FL MINI XS2 20W 100°

IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
20	I	✓	80	4000	SYMM	100°	-	2400	■	GWF1100BL840	✓
20	I	✓	80	3000	SYMM	100°	-	2300	■	GWF1100BL830	✓



ELIA FL MINI XS2 20W 100° PIR

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz + PIR sensor											
20	I	✓	80	4000	SYMM	100°	-	2400	■	GWF1105BL840	✓
20	I	✓	80	3000	SYMM	100°	-	2300	■	GWF1105BL830	✓

